


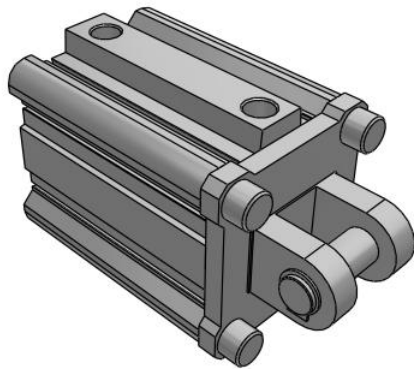

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D80-75DMZ

Datasheet

General series information

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.


Standard specifications

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø80 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	75
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	3.264 Kg

Dimensions

二山クレス形/CG2D-CDQ2D



二山クレス形

寸法	単位	A	B	SL	A	B	SL	CG	CM	CMW	CR
63	mm	100	100	100	100	100	100	100	100	100	100
80	mm	125	125	125	125	125	125	125	125	125	125
100	mm	150	150	150	150	150	150	150	150	150	150
125	mm	175	175	175	175	175	175	175	175	175	175

寸法単位: mm (mm) 寸法単位: mm (mm) 寸法単位: mm (mm) 寸法単位: mm (mm)

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)