


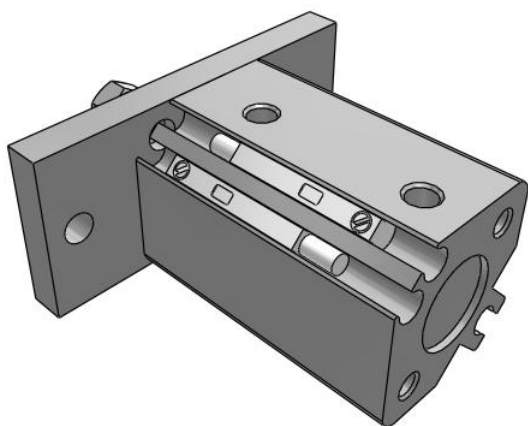

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CDQ2F12-15DMZ-M9BZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	F (Front Flange)
Type	Standard
Bore Size	Ø12 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	15
Body Option	M [Rod End Male Thread]
Auto Switch Groove	Z [Auto Switch Mounting Grooves]
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	M9B--Solid State , Gen. Purpose, 2 Wire, Horizontal
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.000 Kg

—

ロッド側フランジ形／CQ2F



ロッド先端ねじ



ロッド側フランジ形

フランジ外径D ₁ (mm)	フランジ内径D ₂ (mm)	A	B	FD	FT	FV	FX	FZ	L	L ₁
12	5~30	33	17	4.5	5.5	25	45	55	13.5	24
16	5~30	32	18.5	4.5	5.5	30	45	55	13.5	25.5
20	5~50	34	19.5	6.5	8	39	48	60	14.5	28.5
25	5~50	37.5	22.5	6.5	8	42	52	64	15.5	32.5

フランジ金剛材料 炭素鋼

-

-

[CQ2-Z-B_EU.pdf](#)