


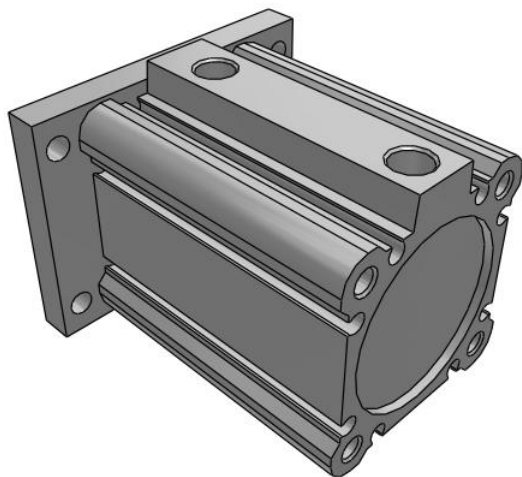

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CDQ2F40-30DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	F (Front Flange)
Type	Standard
Bore Size	Ø40 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	30
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.600 Kg



ロッド端フランジ形

フランジ径	フランジ厚	フランジ外径	フランジ内径	フランジ高さ	フランジ重量	フランジ材料	フランジ加工
10	1.5	11.5	9.5	1.5	0.15	Al	1000
12	1.5	13.5	11.5	1.5	0.20	Al	1000
14	1.5	15.5	13.5	1.5	0.25	Al	1000
16	1.5	17.5	15.5	1.5	0.30	Al	1000
18	1.5	19.5	17.5	1.5	0.35	Al	1000
20	1.5	21.5	19.5	1.5	0.40	Al	1000
22	1.5	23.5	21.5	1.5	0.45	Al	1000
24	1.5	25.5	23.5	1.5	0.50	Al	1000
26	1.5	27.5	25.5	1.5	0.55	Al	1000
28	1.5	29.5	27.5	1.5	0.60	Al	1000
30	1.5	31.5	29.5	1.5	0.65	Al	1000
32	1.5	33.5	31.5	1.5	0.70	Al	1000
34	1.5	35.5	33.5	1.5	0.75	Al	1000
36	1.5	37.5	35.5	1.5	0.80	Al	1000
38	1.5	39.5	37.5	1.5	0.85	Al	1000
40	1.5	41.5	39.5	1.5	0.90	Al	1000
42	1.5	43.5	41.5	1.5	0.95	Al	1000
44	1.5	45.5	43.5	1.5	1.00	Al	1000
46	1.5	47.5	45.5	1.5	1.05	Al	1000
48	1.5	49.5	47.5	1.5	1.10	Al	1000
50	1.5	51.5	49.5	1.5	1.15	Al	1000
52	1.5	53.5	51.5	1.5	1.20	Al	1000
54	1.5	55.5	53.5	1.5	1.25	Al	1000
56	1.5	57.5	55.5	1.5	1.30	Al	1000
58	1.5	59.5	57.5	1.5	1.35	Al	1000
60	1.5	61.5	59.5	1.5	1.40	Al	1000
62	1.5	63.5	61.5	1.5	1.45	Al	1000
64	1.5	65.5	63.5	1.5	1.50	Al	1000
66	1.5	67.5	65.5	1.5	1.55	Al	1000
68	1.5	69.5	67.5	1.5	1.60	Al	1000
70	1.5	71.5	69.5	1.5	1.65	Al	1000
72	1.5	73.5	71.5	1.5	1.70	Al	1000
74	1.5	75.5	73.5	1.5	1.75	Al	1000
76	1.5	77.5	75.5	1.5	1.80	Al	1000
78	1.5	79.5	77.5	1.5	1.85	Al	1000
80	1.5	81.5	79.5	1.5	1.90	Al	1000
82	1.5	83.5	81.5	1.5	1.95	Al	1000
84	1.5	85.5	83.5	1.5	2.00	Al	1000
86	1.5	87.5	85.5	1.5	2.05	Al	1000
88	1.5	89.5	87.5	1.5	2.10	Al	1000
90	1.5	91.5	89.5	1.5	2.15	Al	1000
92	1.5	93.5	91.5	1.5	2.20	Al	1000
94	1.5	95.5	93.5	1.5	2.25	Al	1000
96	1.5	97.5	95.5	1.5	2.30	Al	1000
98	1.5	99.5	97.5	1.5	2.35	Al	1000
100	1.5	101.5	99.5	1.5	2.40	Al	1000

フランジ径単位: mm
フランジ厚単位: mm
フランジ外径単位: mm
フランジ内径単位: mm
フランジ高さ単位: mm
フランジ重量単位: g

-

-

CQ2-Z-B_EU.pdf