


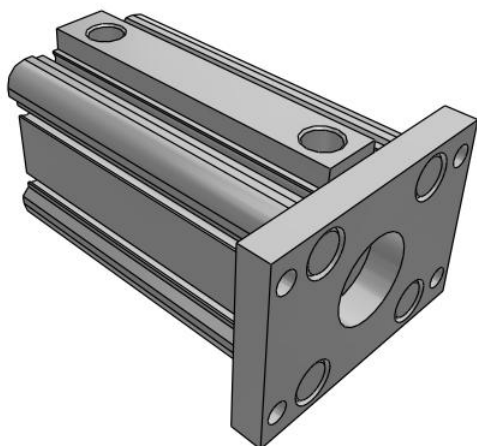

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CDQ2G32TF-50DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	G (Rear Flange)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	50
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.583 Kg

ヘッド側フランジ形 / CQ2G・CDQ2G		ヘッド側フランジ形		単位:mm	
径φ	寸法	径φ	寸法	A	L
52	110	40	40	7	75.5
60	120	50	50	8.5	77
80	140	70	70	10.5	80.5
90	150	80	80	12.5	83.5

※A、Lは寸法は図に示す
 ロッド側フランジ形も適用です。

-

-

CQ2-Z-B_EU.pdf