


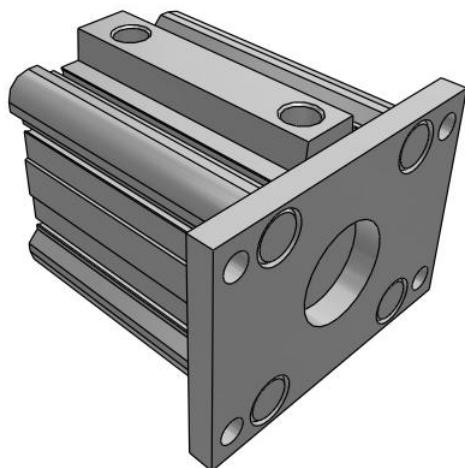


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2G63-50DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	G (Rear Flange)
Type	Standard
Bore Size	Ø63 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	50
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	1.942 Kg

ヘッド側フランジ形 / CQ2G-CDQ2G



ヘッド側フランジ形

フランジ径 (mm)	フランジ厚 (mm)	フランジ外径 (mm)	フランジ内径 (mm)	フランジ孔径 (mm)	フランジ孔距 (mm)	フランジ孔径 (mm)	フランジ孔距 (mm)	フランジ孔径 (mm)	フランジ孔距 (mm)
63	10	63	53	10	115	10	115	10	115
80	10	80	70	10	130	10	130	10	130
100	10	100	90	10	150	10	150	10	150

フランジ径・フランジ厚・フランジ孔径・フランジ孔距

-

-

CQ2-Z-B_EU.pdf