


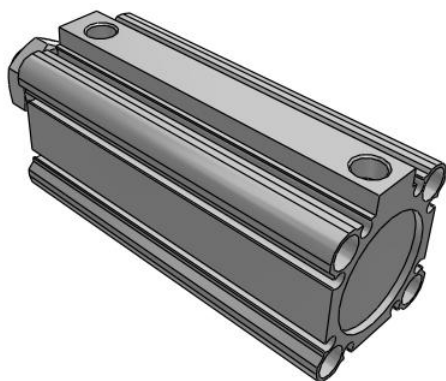

## C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2B32-65DMZ

Datasheet

### General series information

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.




### Standard specifications

|                                  |                                                       |
|----------------------------------|-------------------------------------------------------|
| Magnet                           | None                                                  |
| Mounting                         | B (Through Hole [Standard])                           |
| Type                             | Standard                                              |
| Bore Size                        | Ø32 mm                                                |
| Port Thread                      | Rc (or M Thread for 16 and 20 Bore or 32 stroke 5 mm) |
| Stroke                           | 65                                                    |
| Body Option                      | M [Rod End Male Thread]                               |
| Auto Switch Groove               | Z [Auto Switch Mounting Grooves]                      |
| Mounting Bolt                    | None                                                  |
| Rod End Bracket                  | None                                                  |
| Auto Switch                      | No Switch                                             |
| Lead Wire or Pre-wired Connector | 0.5 m (Or None in the Case of No Switch)              |
| Number                           | 2 pcs.                                                |
| Rod End Options                  | None                                                  |
| Temperature Resistance           | None                                                  |
| Low Speed                        | None                                                  |
| Made of Stainless Steel          | None                                                  |
| Fluororubber Seal                | None                                                  |


|                                                         |                |
|---------------------------------------------------------|----------------|
| Pressure medium                                         | Compressed air |
| Maximum temperature of pressure medium                  | 70 °C          |
| Minimum temperature of pressure medium                  | -10 °C         |
| Maximum operating pressure                              | 1.0 MPa        |
| Minimum operating pressure                              | 0,05 Mpa       |
| Proof pressure                                          | 1.5 MPa        |
| Maximum ambient temperature                             | 70 °C          |
| Minimum ambient temperature                             | -10 °C         |
| Number of pneumatic connections                         | 2 pcs.         |
| Pneumatic input connection                              | Rc 1/8         |
| Mode of operation of drive                              | Double acting  |
| Theoretical cylinder force, advance stroke (at 0.5 MPa) | 402 N          |
| Theoretical cylinder force, return stroke (at 0.5 MPa)  | 302 N          |
| Maximum piston speed                                    | 500 mm/s       |
| Geometric form of the piston rod                        | Single rod     |
| Male thread of rod end                                  | M14 x 1.5      |
| Female thread of rod end                                | M8 x 1.25      |
| Minimum piston speed                                    | 50 mm/s        |
| Weight                                                  | 0.454 Kg       |

Dimensions

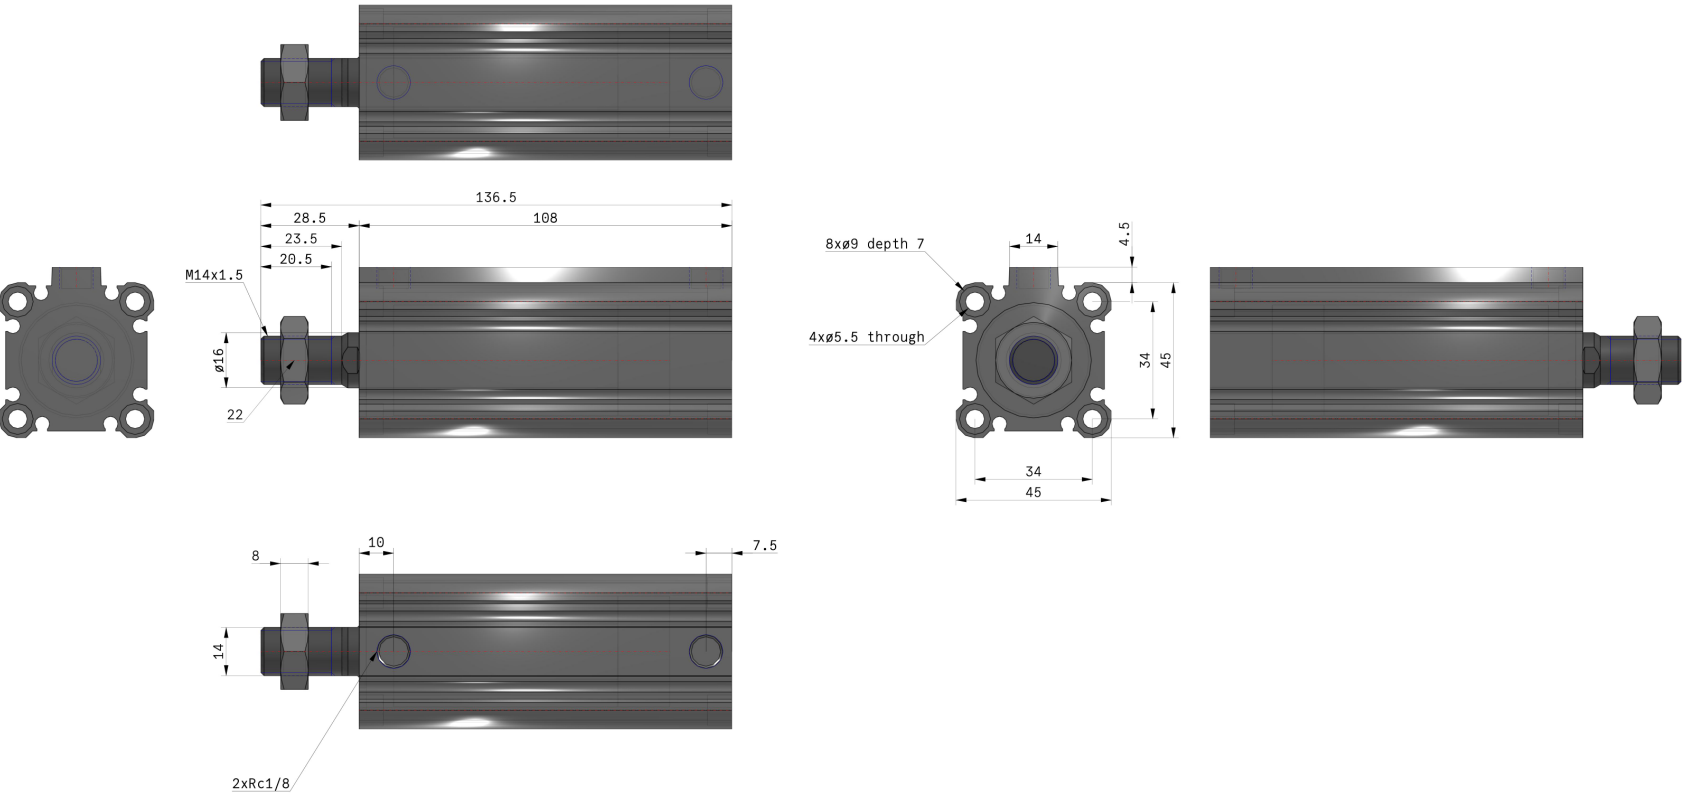

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

## Constructions

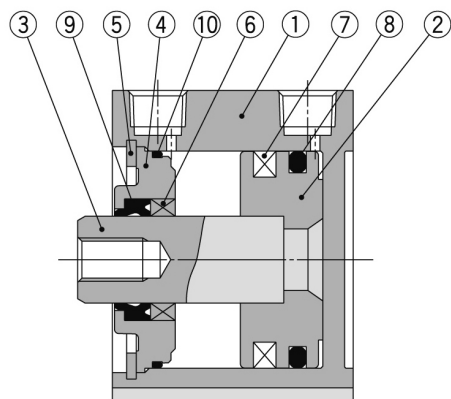

### Component Parts

| No. | Description    | Material              | Note                            |
|-----|----------------|-----------------------|---------------------------------|
| 1   | Cylinder tube  | Aluminum alloy        | Hard anodised                   |
| 2   | Piston         | Aluminum alloy        | Chromated                       |
| 3   | Piston rod     | Stainless steel       | ø12 to ø25                      |
|     |                | Carbon steel          | ø32 to ø100, Hard chrome plated |
| 4   | Collar         | Aluminum alloy        | ø12 to ø40, Anodised            |
|     |                | Aluminum alloy casted | ø50 to ø100, Chromated, Painted |
| 5   | Retaining ring | Carbon tool steel     | Phosphate coated                |
| 6   | Bushing        | Bearing alloy         | For ø50 or more only            |
| 7   | Magnet         | —                     |                                 |
| 8   | Piston seal    | NBR                   |                                 |
| 9   | Rod seal       | NBR                   |                                 |
| 10  | Gasket         | NBR                   |                                 |

### Replacement Parts/Seal Kit (Pneumatic type)

| Bore size (mm) | Kit no.    | Contents                                   |
|----------------|------------|--------------------------------------------|
| 12             | CQ2B12-PS  | Kits include items ⑧, ⑨, ⑩ from the table. |
| 16             | CQ2B16-PS  |                                            |
| 20             | CQ2B20-PS  |                                            |
| 25             | CQ2B25-PS  |                                            |
| 32             | CQ2B32-PS  |                                            |
| 40             | CQ2B40-PS  |                                            |
| 50             | CQ2B50-PS  |                                            |
| 63             | CQ2B63-PS  |                                            |
| 80             | CQ2B80-PS  |                                            |
| 100            | CQ2B100-PS |                                            |

- \* Seal kit includes ⑧, ⑨, ⑩. Order the seal kit, based on each bore size.  
 \* Since the seal kit does not include a grease pack, order it separately.  
**Grease pack part no.: GR-S-010 (10 g)**

### Replacement Parts/Seal Kit (Air-hydro type)

| Bore size (mm) | Kit no.     | Contents                                   |
|----------------|-------------|--------------------------------------------|
| 20             | CQ2BH20-PS  | Kits include items ⑧, ⑨, ⑩ from the table. |
| 25             | CQ2BH25-PS  |                                            |
| 32             | CQ2BH32-PS  |                                            |
| 40             | CQ2BH40-PS  |                                            |
| 50             | CQ2BH50-PS  |                                            |
| 63             | CQ2BH63-PS  |                                            |
| 80             | CQ2BH80-PS  |                                            |
| 100            | CQ2BH100-PS |                                            |

- \* Seal kit includes ⑧, ⑨, ⑩. Order the seal kit, based on each bore size.  
 \* Since the seal kit does not include a grease pack, order it separately.  
**Grease pack part no.: GR-S-010 (10 g)**

## Additional information

|                   |                                       |
|-------------------|---------------------------------------|
| Catalogue         | <a href="#">CQ2-Z-C_EU.pdf</a>        |
| Operation manuals | <a href="#">OM_CQ2x_OM0002MEN.pdf</a> |