


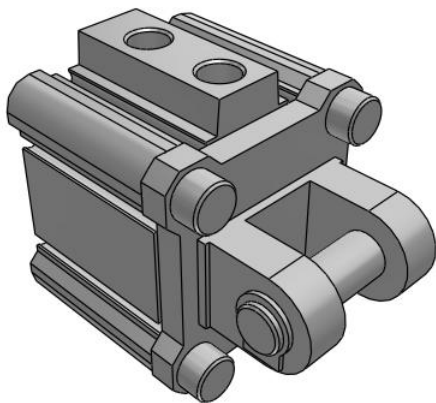

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2D40TF-10DZ

Datasheet

General series information

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	None
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø40 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	10
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.406 Kg

Dimensions

二山ワレビス形 / CQ2D・CDQ2D

二山ワレビス形 / CQ2D・CDQ2D

二山ワレビス形 / CQ2D・CDQ2D

二山ワレビス形 / CQ2D・CDQ2D

寸法	単位	A	B	C	D	E	F	G	H	I	J	K	L
32	mm	125	70	100	100	100	100	100	100	100	100	100	100
40	mm	125	70	100	100	100	100	100	100	100	100	100	100
50	mm	125	70	100	100	100	100	100	100	100	100	100	100

二山ワレビス形 / CQ2D・CDQ2D

二山ワレビス形 / CQ2D・CDQ2D

二山ワレビス形 / CQ2D・CDQ2D

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)