


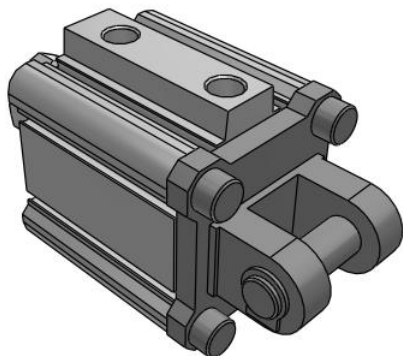

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CQ2D40TF-25DMZ

Datasheet

General series information


- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	None
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø40 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	25
Body Option	M [Rod End Male Thread]
Auto Switch Groove	Z [Auto Switch Mounting Grooves]
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5 m or None in the Case of No Switch
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
Pressure medium	Compressed air
Number of pneumatic connections	2 pcs.
Mode of operation of drive	Double acting
Geometric form of the piston rod	Single rod
Weight	0.507 Kg

Dimensions



ニ山クレブシ形											(mm)
ナット径	ナット高	ボルト径				ボルト高					
		A	B	C	L	A	B	C	L	DO	CT
32	75.100	100	210	100	30	130	30	60	10	5	14
40	75.100	100	210	100	30	130	30	60	10	5	14
50	75.100	100	210	100	30	130	30	60	10	5	14
60	75.100	100	210	100	30	130	30	60	10	5	14
70	75.100	100	210	100	30	130	30	60	10	5	14
80	75.100	100	210	100	30	130	30	60	10	5	14
90	75.100	100	210	100	30	130	30	60	10	5	14
100	75.100	100	210	100	30	130	30	60	10	5	14
110	75.100	100	210	100	30	130	30	60	10	5	14
120	75.100	100	210	100	30	130	30	60	10	5	14
130	75.100	100	210	100	30	130	30	60	10	5	14
140	75.100	100	210	100	30	130	30	60	10	5	14
150	75.100	100	210	100	30	130	30	60	10	5	14
160	75.100	100	210	100	30	130	30	60	10	5	14
170	75.100	100	210	100	30	130	30	60	10	5	14
180	75.100	100	210	100	30	130	30	60	10	5	14
190	75.100	100	210	100	30	130	30	60	10	5	14
200	75.100	100	210	100	30	130	30	60	10	5	14
210	75.100	100	210	100	30	130	30	60	10	5	14
220	75.100	100	210	100	30	130	30	60	10	5	14
230	75.100	100	210	100	30	130	30	60	10	5	14
240	75.100	100	210	100	30	130	30	60	10	5	14
250	75.100	100	210	100	30	130	30	60	10	5	14
260	75.100	100	210	100	30	130	30	60	10	5	14
270	75.100	100	210	100	30	130	30	60	10	5	14
280	75.100	100	210	100	30	130	30	60	10	5	14
290	75.100	100	210	100	30	130	30	60	10	5	14
300	75.100	100	210	100	30	130	30	60	10	5	14
310	75.100	100	210	100	30						

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)