


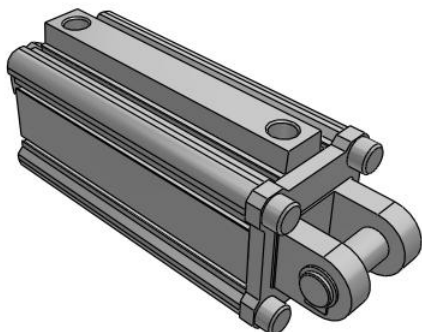

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2D50-100DMZ

Datasheet

General series information


- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	None
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø50 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	100
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air

Dimensions



ニ山クレブシ形											(mm)			
ナット径	ナット高	ボルト径				ボルト高								
		A	B	C	L	A	B	C	L	寸法	寸法			
32	75.100	100	100	100	100	30	30	60	10	5	14.20	16.36	7	8.5
40	75.100	100	100	100	100	30	30	60	10	5	14.20	16.36	7	8.5
50	75.100	100	100	100	100	30	30	60	10	5	14.20	16.36	7	8.5
60	75.100	100	100	100	100	30	30	60	10	5	14.20	16.36	7	8.5

ニ山クレブシボルト 六角ボルト
六角ボルト 六角ボルト

ナット径	N	PR
32	M16	1.0/1.0
40	M16	1.0/1.0
50	M16	1.0/1.0
60	M16	1.0/1.0

※ボルト高ナット高ナットおよびボルト高ナットはGSP 304/316をご参照ください。
※ボルト径ナット径およびボルト高ナット径はGSP 304/316をご参照ください。

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)