


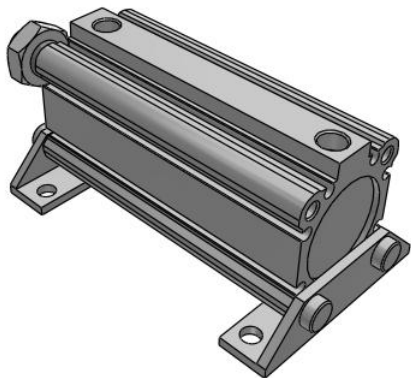


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2L32-60DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	None
Mounting	L (Foot)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	60
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.573 Kg

フート形/CQ2L・CDQ2L



フート形

フート形 (mm)

フートタイプ	310	320	330	340	350	360	370	380	390	400	410	420	430	440	450	460	470	480	490	500
	A	B	L	A	B	L	A	B	L	A	B	L	A	B	L	A	B	L	A	B
32	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
33	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
34	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
35	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
36	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
37	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
38	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
39	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
40	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
41	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
42	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
43	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
44	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
45	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
46	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
47	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
48	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
49	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100
50	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100	100	76	100

フート実寸単位: 取付基準
取付基準: ニンゲル・フート

-
-

CQ2-Z-B_EU.pdf