


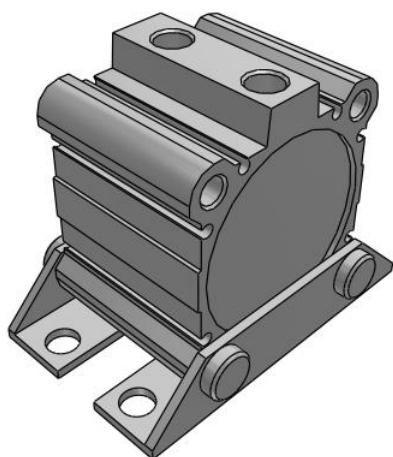

## C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove


### CQ2L63-25DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Magnet                          | None                                 |
| Mounting                        | L (Foot)                             |
| Type                            | Standard                             |
| Bore Size                       | Ø63 mm                               |
| Port Thread Type                | Rc                                   |
| Lube-retainer                   | Without Stable Lubrication Function  |
| Stroke                          | 25                                   |
| Body Option                     | Standard [Rod End Female Thread]     |
| Auto Switch Groove              | None, also for 12-25 Bore w/o Magnet |
| Mounting Bolt                   | None                                 |
| Rod End Bracket                 | None                                 |
| Auto Switch                     | No Switch                            |
| Lead Wire or Prewired Connector | Z (5 m)                              |
| Number                          | 2 pcs.                               |
| Rod End Options                 | None                                 |
| Temperature Resistance          | None                                 |
| Low Speed                       | None                                 |
| Made of Stainless Steel         | None                                 |

|                   |                |
|-------------------|----------------|
| Fluororubber Seal | None           |
| -                 | Compressed air |
| Weight            | 0.915 Kg       |

フート形/CQ2L・CDQ2L



フート形

| フットプリント         |                     |            |    |    |    |    |                    |     |    |     |     |
|-----------------|---------------------|------------|----|----|----|----|--------------------|-----|----|-----|-----|
| フットプリント<br>(mm) | フットプリントの<br>長さ (mm) | ポート・スイッチャー |    |    |    |    | ポート・スイッチャーの<br>ポート |     |    |     |     |
|                 |                     | L          | B  | L  | B  | L  | L                  | L/D | L  | L/M | L/M |
| 63              | 10-90               | 90         | 90 | 90 | 90 | 90 | 72                 | 66  | 20 | 18  | 43  |
| 80              | 10-90               | 90         | 90 | 90 | 90 | 90 | 90                 | 53  | 52 | 5   | 5   |
| 90              | 10-90               | 90         | 90 | 90 | 90 | 90 | 90                 | 53  | 52 | 5   | 5   |
| 100             | 10-90               | 90         | 90 | 90 | 90 | 90 | 90                 | 53  | 52 | 5   | 5   |
| 160             | 75-100              | 90         | 90 | 90 | 90 | 90 | 63                 | 29  | 22 | 13  | 7   |

フットプリントの長さ: 90mm  
 フットプリントの幅: 90mm  
 フットプリントの高さ: 90mm  
 フットプリントの厚さ: 90mm  
 フットプリントの重量: 90g  
 フットプリントの価格: 90円

フート堂具材質:吹奏銅  
表面処理:ニッケルめっき

-

-

CQ2-Z-B\_EU.pdf