


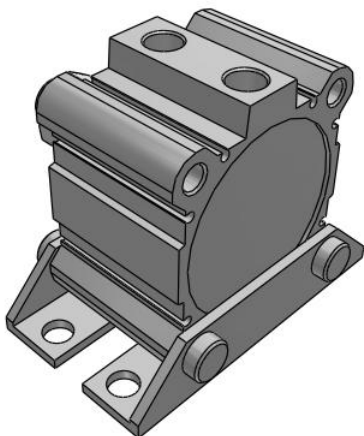


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2L80TF-25DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	None
Mounting	L (Foot)
Type	Standard
Bore Size	Ø80 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	25
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.000 Kg

フート形/CQ2L・CDQ2L



フート形

フットプリント												
フットプリント (mm)	フットプリント (mm)	オートスキャン型					オートスキャン型					L ₁ (mm)
		A	B	L	S	X	A	B	L	S	X	
63	10-90	92	36	20	10	72.2	46	20	18	43.5	11	5
80	10-90	92	36	20	10	72.2	46	20	18	43.5	11	5
100	10-90	92	36	20	10	72.2	46	20	18	43.5	11	5
160	10-90	92	36	20	10	72.2	46	20	18	43.5	11	5
	75-100	98	63	29	98	63	29	22	53.5	13	7	16

フットプリントは、測定対象の寸法に依存して変化する場合があります。
 表面粗度：ニッケルメッキ

フート堂具材質:鉄素鋼
表面処理:ニッケルめっき

-
-

CQ2-Z-B_EU.pdf