


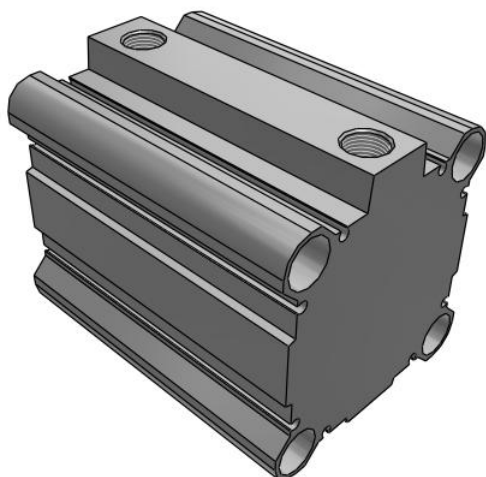

C(D)Q2-XB10, Compact Cylinder, Double Acting Single Rod, Intermediate stroke with exclusive body

CDQ2B80-60DZ-XB10

Datasheet

General series information


- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 6 to 99
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	D (Built-in)
Mounting	B (Through Hole [Standard])
Bore Size	Ø80 mm
Port Thread	Rc: 32-100 Bore; M Thread 12 to 25 Bore
Stroke	60
Body Option	Standard (Rod End Female Thread)
Auto Switch Groove	Z (Auto Switch Mounting Grooves)
Auto Switch	No Switch
Lead Wire or Pre-wired Connector	0.5 m (Or None in the Case of No Switch)
Number	2 pcs.
Pressure medium	Compressed air
Number of pneumatic connections	2 pcs.
Mode of operation of drive	Double acting
Geometric form of the piston rod	Single rod
Weight	1.762 Kg

Dimensions

$\phi 63 \sim \phi 100$ オートスイッチ付

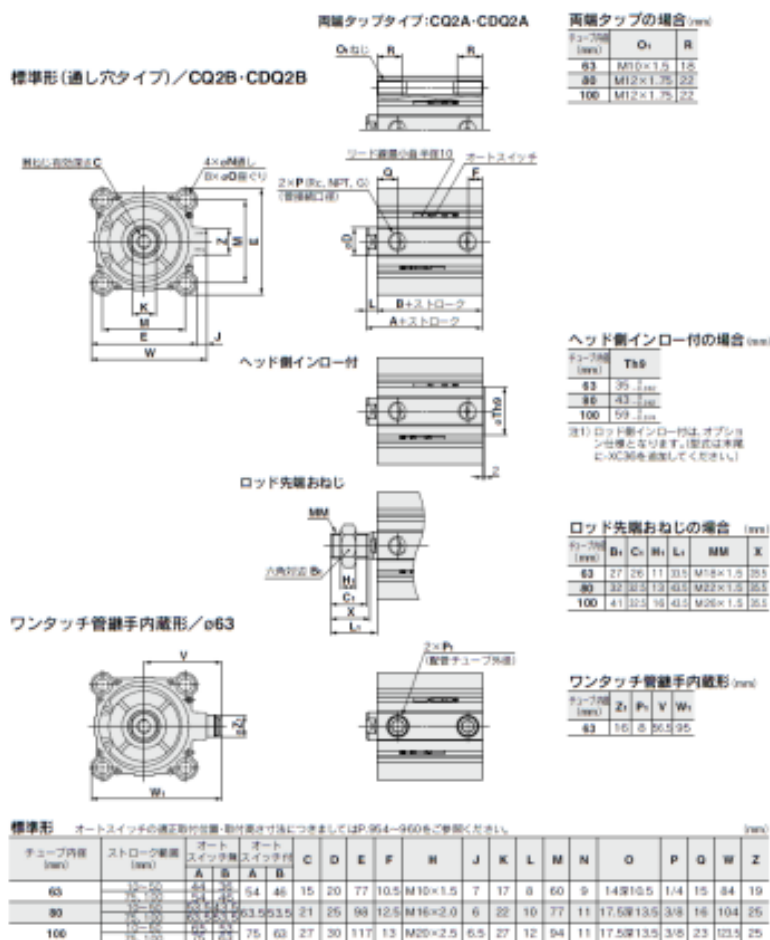

Additional information

Catalogue	CQ2-Z-D_EU.pdf
Operation manuals	OM_CQ2x_OM0002MEN.pdf