


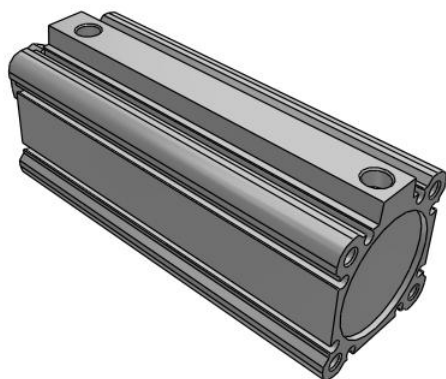

## C(D)Q2K, Compact Cylinder, Double Acting, Single Rod, Non-rotating w/Auto Switch Mounting Groove

### CDQ2KA40TF-100DMZ

Datasheet

### General series information


- Double acting, single rod, non-rotating compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 63 bore)
- Can mount small auto switches on 4 surfaces.

*Double-acting, single-rod cylinder*

### Standard specifications

|                                 |                                          |
|---------------------------------|------------------------------------------|
| Magnet                          | D (Built-in)                             |
| Mounting                        | A (Both Ends Tapped; 40 Through 63 Bore) |
| Bore Size                       | Ø40 mm                                   |
| Port Thread Type                | TF (G)                                   |
| Stroke                          | 100                                      |
| Body Option                     | M (Rod End Male Thread)                  |
| Auto Switch Groove              | None [for 12-25 Bore w/o Magnet]         |
| Auto Switch                     | No Switch                                |
| Lead Wire or Prewired Connector | Z (5 m)                                  |
| Number                          | 2 pcs.                                   |
| Rod End Options                 | None                                     |
| -                               | Compressed air                           |
| Weight                          | 0.683 Kg                                 |

## Dimensions



## Additional information

Catalogue

[CQ2-Z-B\\_EU.pdf](#)