


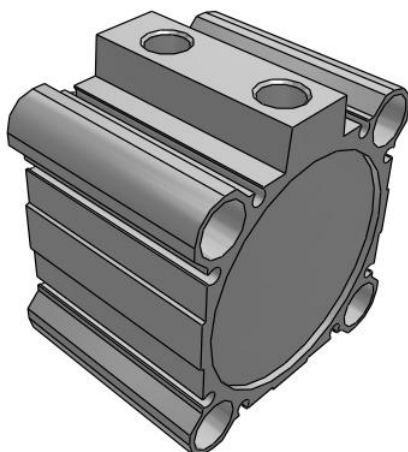

## C(D)Q2K, Compact Cylinder, Double Acting, Single Rod, Non-rotating w/Auto Switch Mounting Groove CDQ2KB63-15DMZ

Datasheet

### General series information


- Double acting, single rod, non-rotating compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 63 bore)
- Can mount small auto switches on 4 surfaces.

*Double-acting, single-rod cylinder*

### Standard specifications

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Magnet                          | D (Built-in)                                    |
| Mounting                        | B (Through Hole [Standard; 12 through 63 Bore]) |
| Bore Size                       | Ø63 mm                                          |
| Port Thread Type                | Rc                                              |
| Stroke                          | 15                                              |
| Body Option                     | M (Rod End Male Thread)                         |
| Auto Switch Groove              | None [for 12-25 Bore w/o Magnet]                |
| Auto Switch                     | No Switch                                       |
| Lead Wire or Prewired Connector | Z (5 m)                                         |
| Number                          | 2 pcs.                                          |
| Rod End Options                 | None                                            |
| -                               | Compressed air                                  |
| Weight                          | 0.745 Kg                                        |

## Dimensions



## Additional information

Catalogue

[CQ2-Z-B\\_EU.pdf](#)