


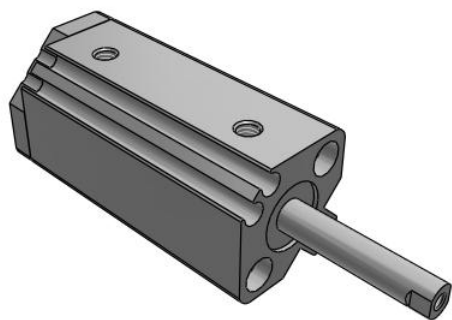


C(D)Q2KW, Compact Cylinder, Double Acting, Double Rod, Non- rotating w/Auto Switch Mounting Groove CDQ2KWB12-25DCZ

Datasheet

General series information

- Double acting, double rod, non-rotating compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 63 bore)
- Can mount small auto switches on 4 surfaces.



Double-acting cylinder with double piston rod

Standard specifications

Magnet	D (Built-in)
Mounting	B (Through Hole [Standard; 12 through 63 Bore])
Bore Size	Ø12 mm
Port Thread Type	Rc: 32-100 Bore; M Thread 12 to 25 Bore
Stroke	25 mm
Body Option	C (Rubber Bumper)
Auto Switch Groove	Z (Auto Switch Mounting Grooves)
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5 m or None in the Case of No Switch
Number	2 pcs.
Rod End Options	None
Pressure medium	Compressed air
Maximum temperature of pressure medium	60 °C
Minimum temperature of pressure medium	-10 °C [without condensation]
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.07 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C


Minimum ambient temperature	-10 °C [without condensation]
Number of pneumatic connections	2 pcs.
Pneumatic input connection	M5
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	42 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	42 N
Maximum piston speed	500 mm/s
Type of Stroke end	Double rod
Male thread of rod end	M5 x 0.8
Female thread of rod end	M3 x 0.5
Minimum piston speed	50 mm/s
Weight	0.104 Kg

Dimensions

ø12~ø32 オートスイッチ付

標準形(通し穴タイプ)/CDQ2KWB


※Hに有孔深さC
(裏面有孔)
※Hに有孔深さC
(裏面有孔)
※Hに有孔深さC
(裏面有孔)




ピストンロッド
断面形状




ø12, ø16の場合



ø25, ø32の場合



ø32



ピストンロッド
断面形状



ø16~ø25



ø32



ピストンロッド
断面形状







ø16~ø25



ø32



ピストンロッド
断面形状



標準形(通し穴タイプ)/CDQ2KWB

※Hに有孔深さC
(裏面有孔)
※Hに有孔深さC
(裏面有孔)
※Hに有孔深さC
(裏面有孔)



標準形		オートスイッチの選定取付位置・取付高さ付法につきましてはP254~260をご覧ください。																												(mm)	
チューブ内径 (mm)	ストローク (mm)	A	B	C	D	E	EA	EB	F	G	H	J	K ₁	K ₂	L	M	N	P	Q	S	ThS	U	V	W	Z						
12	5~30	44.4	17.4	6	6	3.3	—	—	10.5	1.5	M3×0.5	—	6.2	6	3.5	22	3.5	M5×0.8	15	15	15	14	25	—	—						
16	5~30	48	41	8	8	3.7	15.5	6.6	10	1.5	M4×0.7	—	6	6	3.5	28	3.5	M5×0.8	15	28.5	20	15	29	—	—						
20	5~50	56	46	7	10	4.7	15.6	6.8	8	2	M5×0.8	—	8	8	4.5	36	3.5	M5×0.8	16	35.5	15	18	36	—	—						
25	5~60	57	47	12	12	5.2	15.6	6.8	9	2	M6×1.0	—	10	10	5	40	5.5	M6×0.8	17	40.5	15	21	40	—	—						
32	5~70, 75, 100	63.5	49.5	13	16	4.6	—	—	10	2	M6×1.25	4.5	14	14	7	34	5.5	5/8	19	—	21	—	—	48.5	14						

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)


チューブ内径ストローク範囲 (mm)

チューブ内径ストローク範囲 (mm)


チューブ内径ストローク範囲 (mm)

Constructions


ø12 to ø25



ø32

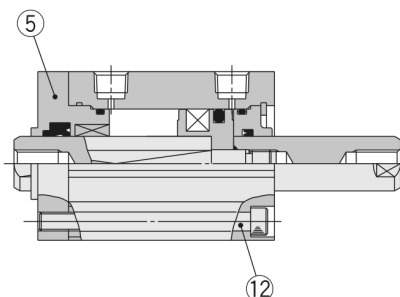

ø40 to ø63

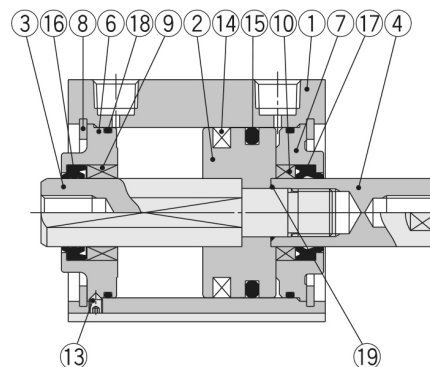

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodised
2	Piston	Aluminum alloy	Chromated
3	Piston rod A	Stainless steel	ø12 to ø25
		Carbon steel	ø32 to ø63, Hard chrome plated
4	Piston rod B	Stainless steel	ø12 to ø25
		Carbon steel	ø32 to ø63, Hard chrome plated
5	Rod cover	Brass	ø12, Electroless nickel plated
		Aluminum alloy	ø16 to ø32, Anodised
6	Collar for non-rotating	Aluminum alloy	ø40 to ø63, Anodised
7	Collar	Aluminum alloy	ø12 to ø40, Anodised
		Aluminum alloy casted	ø50 to ø63, Chromated, Painted
8	Retaining ring	Carbon tool steel	Phosphate coated
9	Bushing for non-rotating	Oil-impregnated sintered alloy	ø16 to ø63
10	Bushing	Bearing alloy	ø50, ø63
11	Hexagon socket head cap screw	Alloy steel	ø12 to ø25, Nickel plated
12	Hexagon socket head cap screw	Alloy steel	ø32, Nickel plated
13	Hexagon socket head set screw	Alloy steel	ø40 to ø63, Nickel plated
14	Magnet	—	

No.	Description	Material	Note
15	Piston seal	NBR	
16	Rod seal for non-rotating	NBR	
17	Rod seal	NBR	
18	Gasket	NBR	
19	Piston gasket	NBR	ø32 to ø63

Additional information

Catalogue

[CQ2-Z-D_EU.pdf](#)

Operation manuals

[OM_CQ2x_OM0002MEN.pdf](#)