

## C(D)Q2W, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove CDQ2WA16-30DCMZ

Datasheet

### General series information


- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

### Standard specifications

|                                  |                                                       |
|----------------------------------|-------------------------------------------------------|
| Magnet                           | D (Built-in)                                          |
| Mounting                         | A (Both Ends Tapped)                                  |
| Type                             | Standard                                              |
| Bore Size                        | Ø16 mm                                                |
| Port Thread                      | Rc (or M Thread for 16 and 20 Bore or 32 stroke 5 mm) |
| Stroke                           | 30 mm                                                 |
| Body Option                      | CM (Rubber Bumper + Rod End Male Thread)              |
| Auto Switch Groove               | Z (Auto Switch Mounting Grooves)                      |
| Auto Switch                      | No Switch                                             |
| Lead Wire or Pre-wired Connector | 0.5 m (Or None in the Case of No Switch)              |
| Number                           | 2 pcs. (Or None in the Case of No Switch)             |
| Rod End Options                  | None                                                  |
| Temperature Resistance           | None                                                  |
| Low Speed                        | None                                                  |
| Made of Stainless Steel          | None                                                  |
| Fluororubber Seal                | None                                                  |
| Pressure medium                  | Compressed air                                        |
| Number of pneumatic connections  | 2 pcs.                                                |

|                            |               |
|----------------------------|---------------|
| Mode of operation of drive | Double acting |
| Weight                     | 0.136 Kg      |

Dimensions

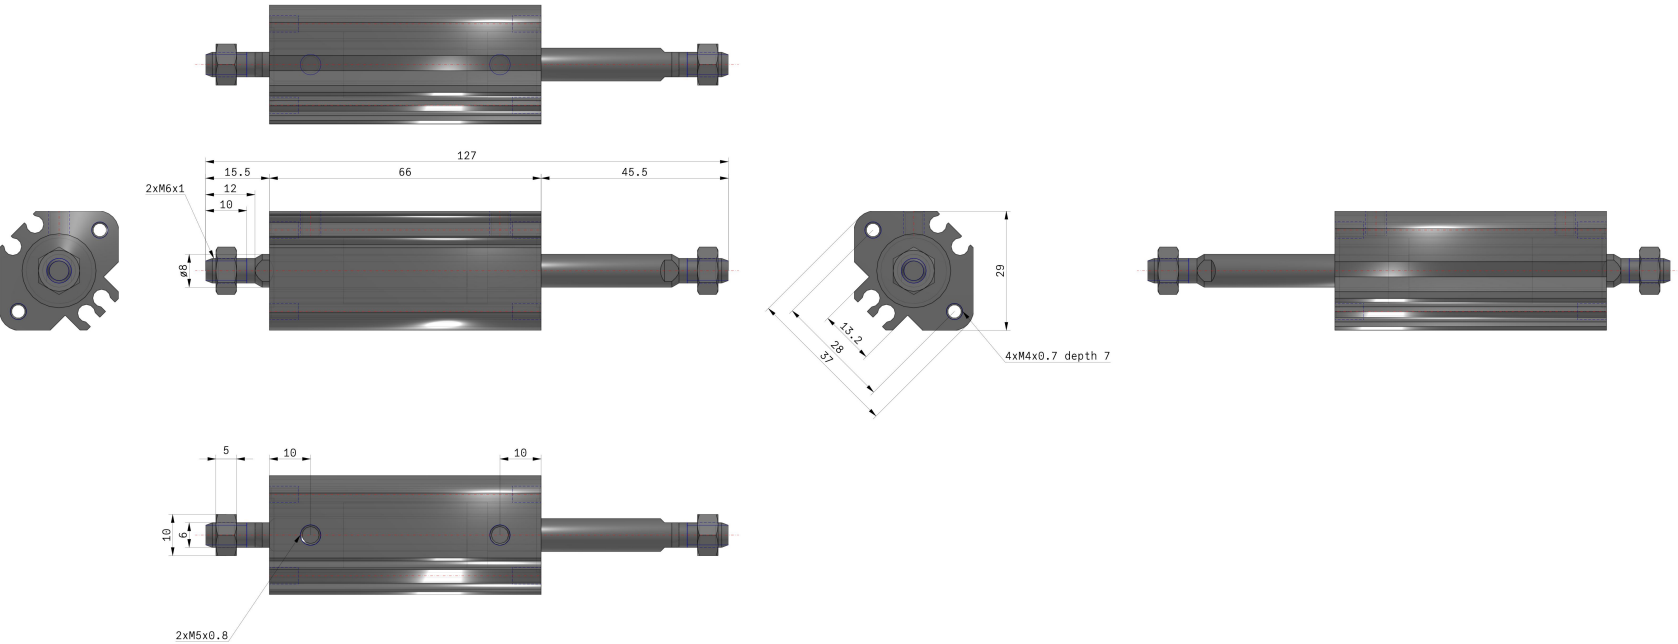

## Additional information

|                   |                                       |
|-------------------|---------------------------------------|
| Catalogue         | <a href="#">CQ2-Z-D_EU.pdf</a>        |
| Operation manuals | <a href="#">OM_CQ2x_OM0002MEN.pdf</a> |