


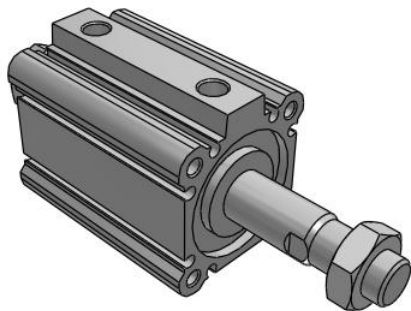

## C(D)Q2W, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove CDQ2WA40-25DMZ

### Datasheet

- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.


### Standard specifications

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Magnet                          | D (Built-in)                            |
| Mounting                        | A (Both Ends Tapped)                    |
| Type                            | Standard                                |
| Bore Size                       | Ø40 mm                                  |
| Port Thread Type                | Rc                                      |
| Stroke                          | 25                                      |
| Body Option                     | M (Rod End Male Thread)                 |
| Auto Switch Groove              | None, also for 12-25 Bore w/o Magnet    |
| Auto Switch                     | No Switch                               |
| Lead Wire or Prewired Connector | Z (5 m)                                 |
| Number                          | 2 pcs. or None in the Case of No Switch |
| Rod End Options                 | None                                    |
| Temperature Resistance          | None                                    |
| Low Speed                       | None                                    |
| Made of Stainless Steel         | None                                    |
| Fluororubber Seal               | None                                    |
| Pressure medium                 | Compressed air                          |
| Number of pneumatic connections | 2 pcs.                                  |
| Mode of operation of drive      | Double acting                           |

|        |          |
|--------|----------|
| Weight | 0.600 Kg |
|--------|----------|

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

## Dimensions



## Additional information

Catalogue

[CQ2-Z-B\\_EU.pdf](#)