


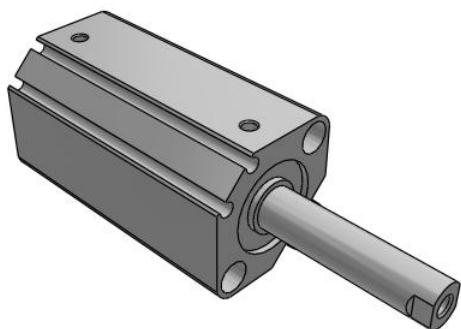

## C(D)Q2W, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove CDQ2WB25-45DZ

Datasheet

### General series information


- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

### Standard specifications

|                                 |                                                     |
|---------------------------------|-----------------------------------------------------|
| Magnet                          | D (Built-in)                                        |
| Mounting                        | B (Through Hole [Standard])                         |
| Type                            | Standard                                            |
| Bore Size                       | Ø25 mm                                              |
| Port Thread Type                | Rc (or M Thread for 16 & 20 Bore or 32 stroke 5 mm) |
| Stroke                          | 45 mm                                               |
| Body Option                     | Standard (Rod End Female Thread)                    |
| Auto Switch Groove              | Z (Auto Switch Mounting Grooves)                    |
| Auto Switch                     | No Switch                                           |
| Lead Wire or Prewired Connector | 0.5 m or None in the Case of No Switch              |
| Number                          | 2 pcs. or None in the Case of No Switch             |
| Rod End Options                 | None                                                |
| Temperature Resistance          | None                                                |
| Low Speed                       | None                                                |
| Made of Stainless Steel         | None                                                |
| Fluororubber Seal               | None                                                |
| Pressure medium                 | Compressed air                                      |
| Number of pneumatic connections | 2 pcs.                                              |

|                            |               |
|----------------------------|---------------|
| Mode of operation of drive | Double acting |
| Weight                     | 0.290 Kg      |

Dimensions

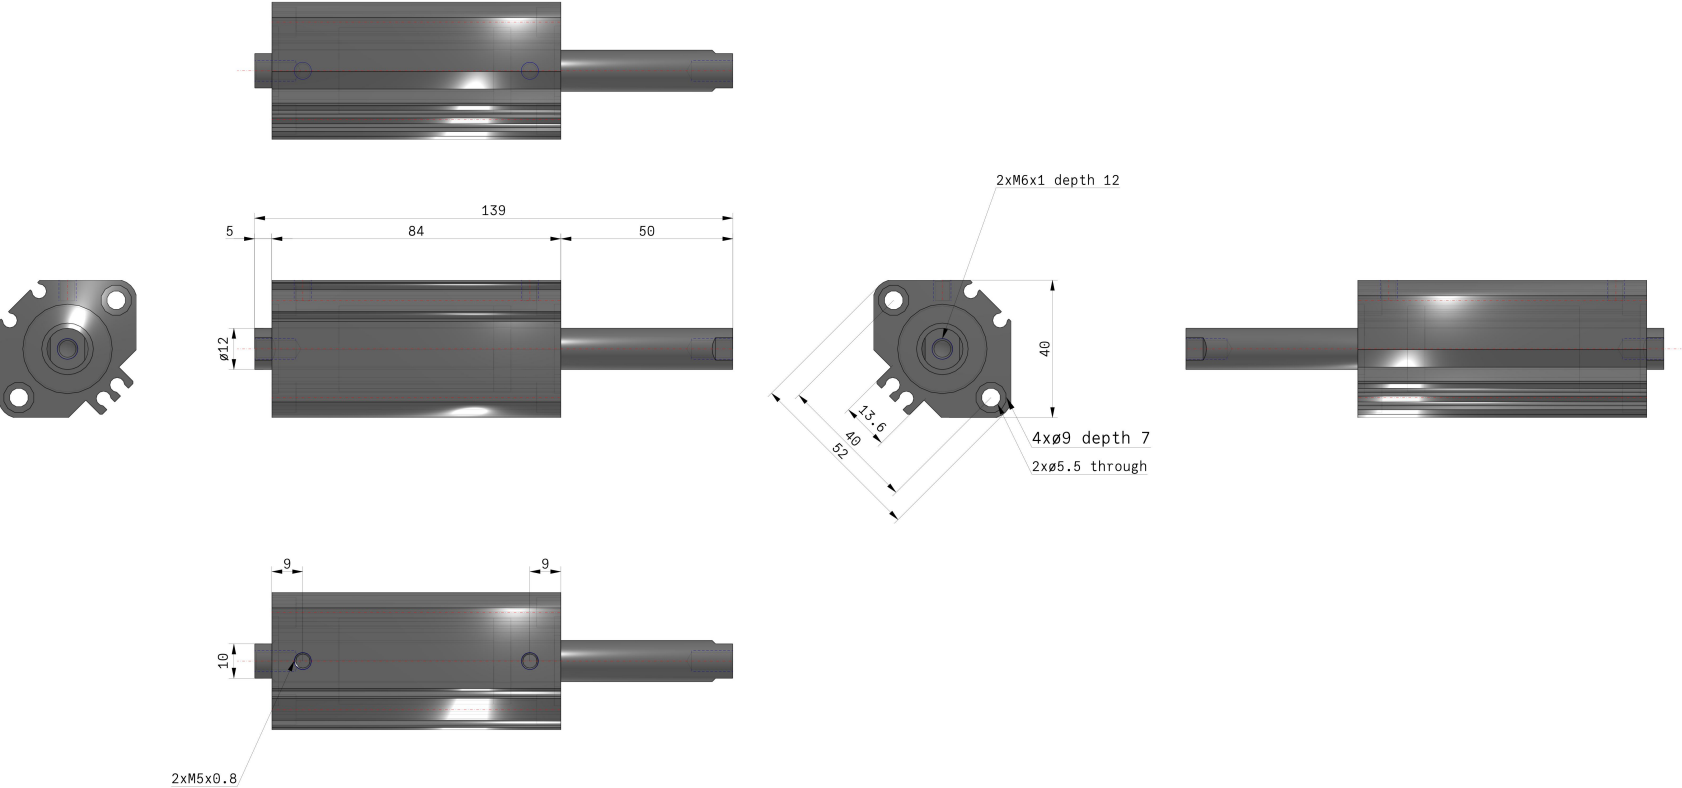

## Additional information

|                   |                                       |
|-------------------|---------------------------------------|
| Catalogue         | <a href="#">CQ2-Z-D_EU.pdf</a>        |
| Operation manuals | <a href="#">OM_CQ2x_OM0002MEN.pdf</a> |