


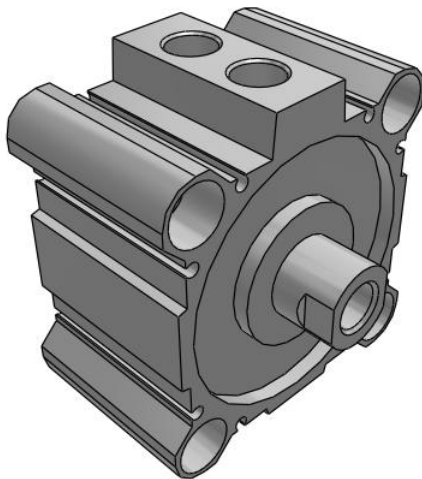

## C(D)Q2W, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove CQ2WB80-10DZ

### Datasheet



- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

### Standard specifications

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Magnet                                 | None                                    |
| Mounting                               | B (Through Hole [Standard])             |
| Type                                   | Standard                                |
| Bore Size                              | Ø80 mm                                  |
| Port Thread Type                       | Rc                                      |
| Stroke                                 | 10                                      |
| Body Option                            | Standard (Rod End Female Thread)        |
| Auto Switch Groove                     | None, also for 12-25 Bore w/o Magnet    |
| Auto Switch                            | No Switch                               |
| Lead Wire or Prewired Connector        | Z (5 m)                                 |
| Number                                 | 2 pcs. or None in the Case of No Switch |
| Rod End Options                        | None                                    |
| Temperature Resistance                 | None                                    |
| Low Speed                              | None                                    |
| Made of Stainless Steel                | None                                    |
| Fluororubber Seal                      | None                                    |
| Pressure medium                        | Compressed air                          |
| Conform to the European RoHS Directive | Not conform                             |
| Number of pneumatic connections        | 2 pcs.                                  |

|                            |               |
|----------------------------|---------------|
| Mode of operation of drive | Double acting |
| Weight                     | 1.234 Kg      |

## Dimensions

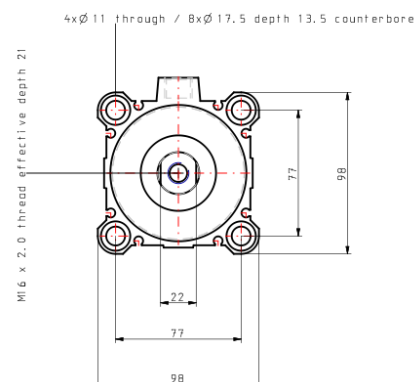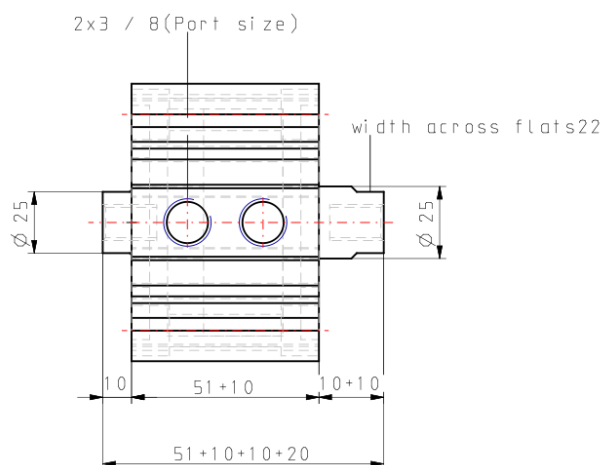

## Additional information

Catalogue

[CQ2-Z-B\\_EU.pdf](#)