


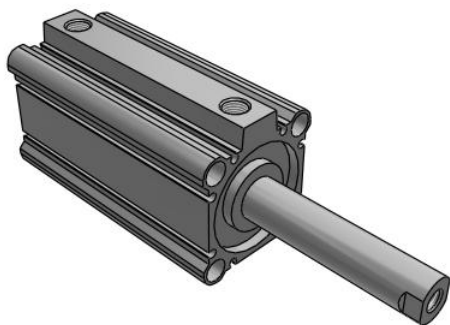

C(D)Q2W-XB10, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove, Intermediate stroke with exclusive body CDQ2WB50TF-80DZ-XB10

Datasheet


General series information

- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 6 to 99
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	D (Built-in)
Mounting	B (Through Hole [Standard])
Bore Size	Ø50 mm
Port Thread Type	TF
Stroke	80
Body Option	Standard (Rod End Female Thread)
Auto Switch Groove	Z (Auto Switch Mounting Grooves)
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5 m or None in the Case of No Switch
Number	2 pcs. or None in the Case of No Switch
Pressure medium	Compressed air
Number of pneumatic connections	2 pcs.
Mode of operation of drive	Double acting
Weight	1.127 Kg

Dimensions



Additional information

Catalogue

[CQ2-Z-C_EU.pdf](#)