


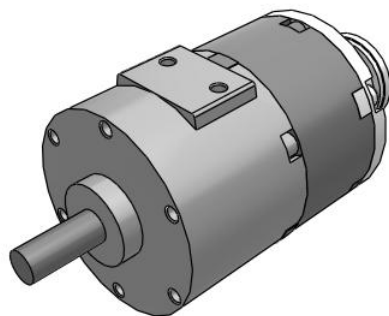

C(D)RB2*W10~40-Z, Rotary Actuator, New Vane Style CDRB2BJU40-100DZ

Datasheet


General series information

- Standard type.
- Piping ports are located on the flat surface.
- Many variations of shaft-end shape (6 types).

Standard specifications

Magnet	D (Built-in)
Mounting	B (Basic)
Standard Shaft Type	J (Long Shaft without Single Flat & with Single Flat)
Angle Adjusting Unit	U (Angle Adjuster)
Size	40 mm
Rotation Angle - Vane	100D (Angle: 100 Double Vane)
Port	Side
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
-	Air (Non-lube)
Weight	0.690 Kg

Dimensions

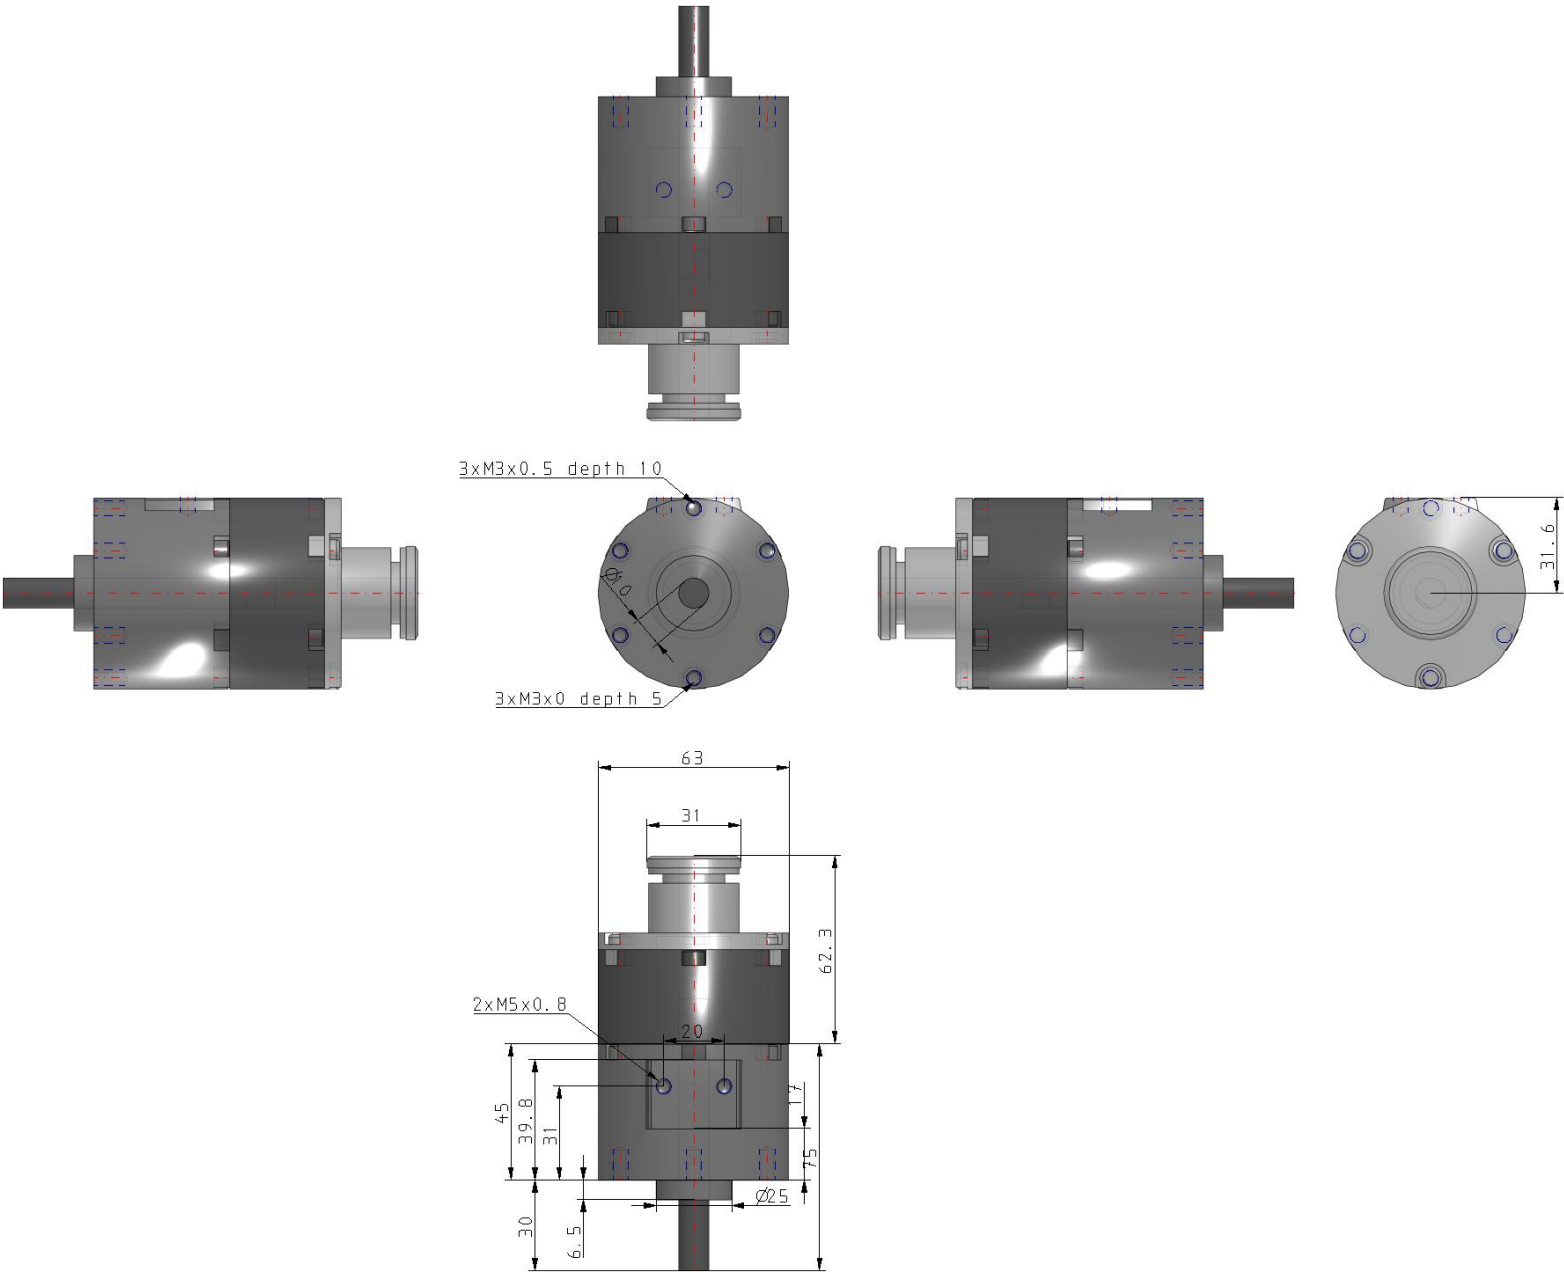

Additional information

Catalogue

[CRB2-C_EU.pdf](#)

Operation manuals

[OM_CRB2_OM00001EN-B.pdf](#)