


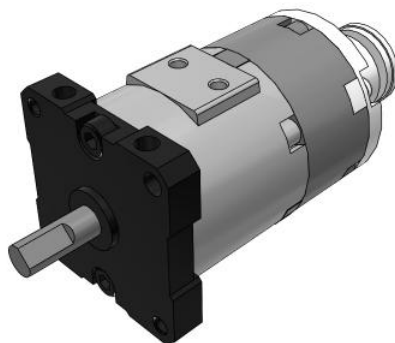


C(D)RBU2*U10~40-Z, Rotary Actuator, Free Mount w/Angle Adjuster, Vane Type CDRBU2WU30-90DZ

Datasheet

General series information

- Free mount type.
- With Angle Adjuster.
- 12% weight reduction.
- Possible to move the plate mounting position as desired.
- Many mounting variations.




Semi-rotary actuator, double acting

Standard specifications

Magnet	D (Built-in)
Shaft Type	W (Single flat)
Size	30 mm
Rotating Angle	90 (90°)
Vane Type	D (Double Vane)
Auto Switch	No Switch
Electrical Entry/Lead Wire Length	0.5m
Number	2 pcs.
-	Air (Non-lube)
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.15 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	5 °C
Pneumatic input connection	M5 x 0.8
Pneumatic exhaust connection	M5 x 0.8
Rotation time adjustment range s/90°	0.04 to 0.3
Shaft load: Allowable radial load	30 N

Shaft load: Allowable thrust load	25 N
Weight	0.456 Kg

Dimensions

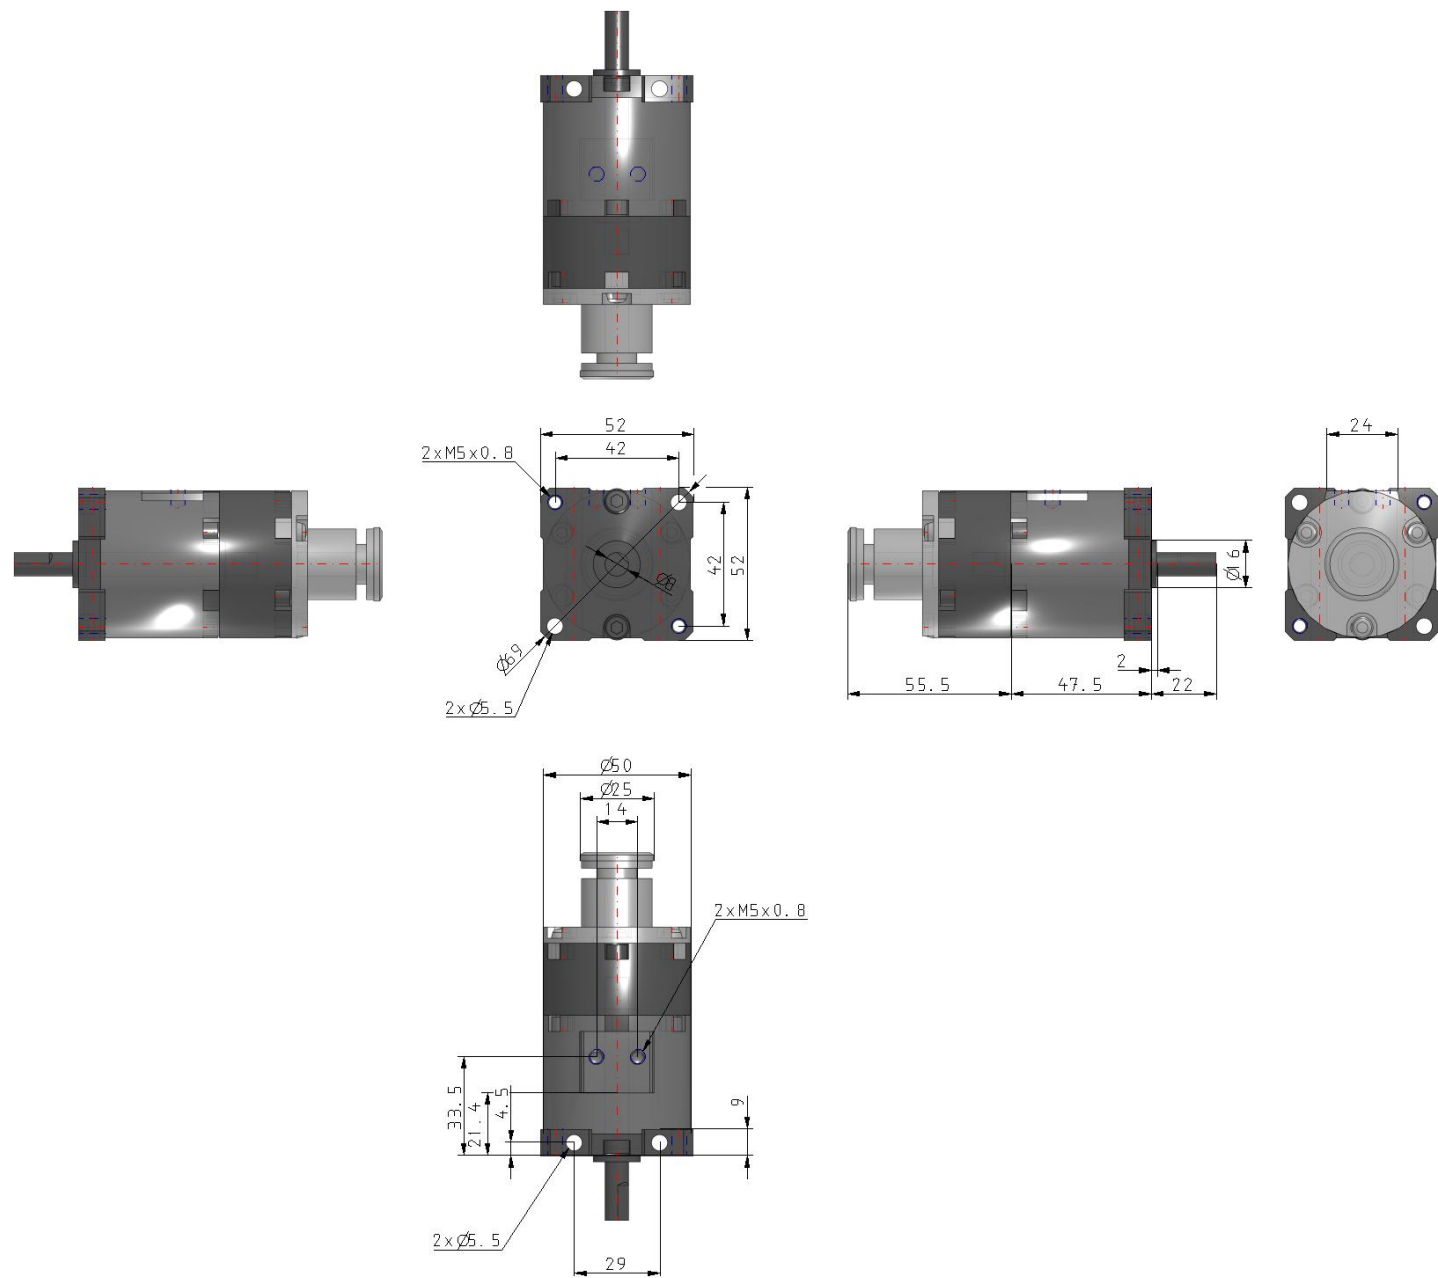


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Constructions


- The unit is common for single vane type and double vane type.

With angle adjuster


Size: 10, 15, 20, 30, 40



Single vane




Double vane

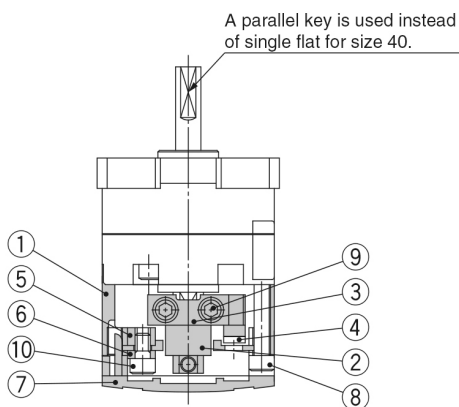


With auto switch and angle adjuster

Size: 10, 15

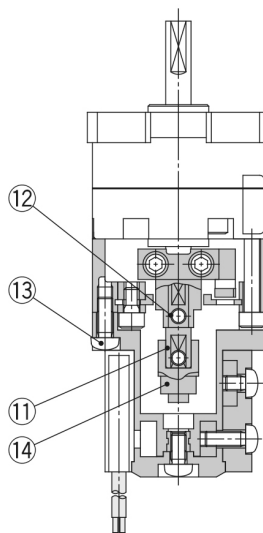


Size: 10



Size: 20, 30, 40

A parallel key is used instead of single flat for size 40.

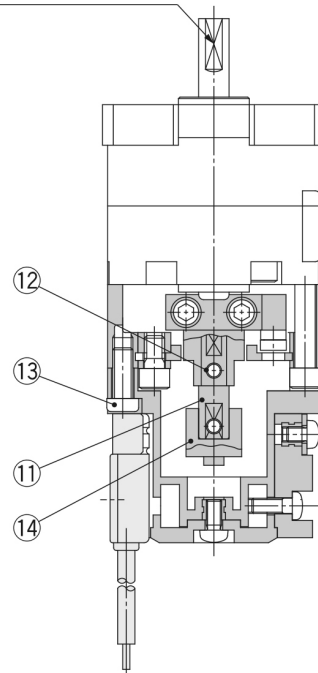

Component Parts

No.	Description	Material	Note
1	Stopper ring	Aluminium alloy	
2	Stopper lever	Chrome molybdenum steel	
3	Lever retainer	Rolled steel	Zinc chromated
4	Rubber bumper	NBR	
5	Stopper block	Chrome molybdenum steel	Zinc chromated
6	Block retainer	Rolled steel	Zinc chromated
7	Cap	Resin	
8	Hexagon socket head cap screw	Stainless steel	Special screw
9	Hexagon socket head cap screw	Stainless steel	Special screw
10	Hexagon socket head cap screw	Stainless steel	Special screw
11	Joint		
12	Hexagon socket head set screw	Stainless steel	Hexagon nut will be used for size 10 only.
	Hexagon nut	Stainless steel	
13	Cross recessed round head screw	Stainless steel	
14	Magnet lever	—	

Additional information

Catalogue

[CRB2-C_EU.pdf](#)