


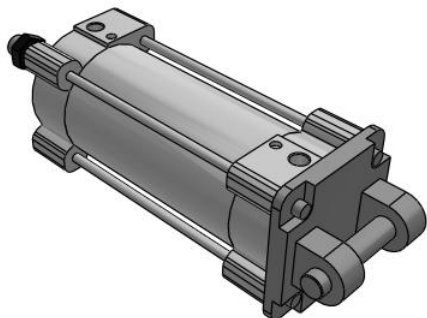

C96S(D) ø125, ISO Cylinder, Double Acting, Single/Double Rod C96SD125-200

Datasheet


- Double acting, standard type, single or double rod
- Bore sizes (mm): 125
- Maximum stroke 2000mm
- Auto switch capable

Standard specifications


Magnet	None
Mounting	D (Double Clevis)
Bore Size	125mm
Stroke	200
Rod Boot	None
Rod	Single Rod
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m [Or None in the Case of No Switch]
Number	2 pcs. [Or None in the Case of No Switch]
Rod End Options	None
Temperature Resistance	None
Heavy Duty Scraper	None
Tie Rod	None
Fluororubber Seal	None
Made of Stainless Steel (-XC68)	None
Made of Stainless Steel (-XC65)	None
-	Compressed Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.05 MPa
Proof pressure	1.5 MPa

Pneumatic input connection	G 1/2
Pneumatic output connection	G 1/2
Maximum piston speed	700 mm/s
Type of cushioning	Both Ends (Air Cushion)
Piston rod end	Male thread
Male thread of rod end	M27 x 2
Weight	0.000 Kg


Dimensions

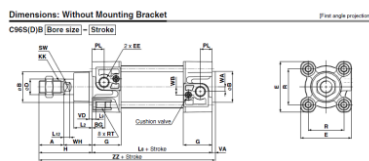


With rod boot

[illegible]


Dimensions: Cylinder Mounting Accessories (First angle projection)





Center trunnion (T)




Flange (F/G)



100



(mm)	41	54	64	80	100	125	160	200
32	46	52	52	55	65	7	142	5



Additional information

Catalogue

[C96-Bb_EU.pdf](#)