


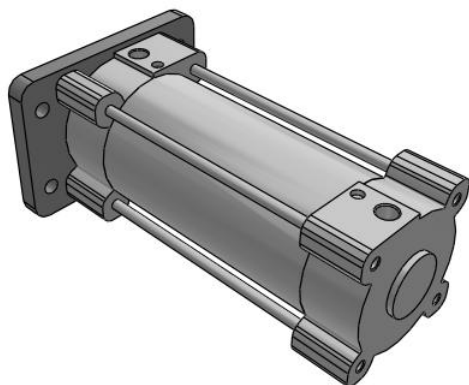

C96S(D) ø125, ISO Cylinder, Double Acting, Single/Double Rod C96SF125-200

Datasheet

General series information


- Double acting, standard type, single or double rod
- Bore sizes (mm): 125
- Maximum stroke 2000mm
- Auto switch capable

Standard specifications


Magnet	None
Mounting	F (Rod End Flange)
Bore Size	125mm
Stroke	200
Rod Boot	None
Rod	Single Rod
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m [Or None in the Case of No Switch]
Number	2 pcs. [Or None in the Case of No Switch]
Rod End Options	None
Temperature Resistance	None
Heavy Duty Scraper	None
Tie Rod	None
Fluororubber Seal	None
Made of Stainless Steel (-XC68)	None
Made of Stainless Steel (-XC65)	None
-	Compressed Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.05 MPa

Proof pressure	1.5 MPa
Pneumatic input connection	G 1/2
Pneumatic output connection	G 1/2
Maximum piston speed	700 mm/s
Type of cushioning	Both Ends (Air Cushion)
Piston rod end	Male thread
Male thread of rod end	M27 x 2
Weight	0.000 Kg


Dimensions

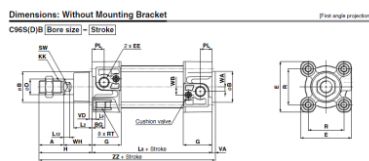


With rod boot

[illegible]


Dimensions: Cylinder Mounting Accessories (First angle projection)





Center trunnion (T)




Flange (F/G)	4 x FB
--------------	--------



100



(mm)	4.1	54	2.4	4.3	2.7	2.2	1.4	1.4
32	48	32	32	33	4.5	7	142	144



Additional information

Catalogue

[C96-Bb_EU.pdf](#)