


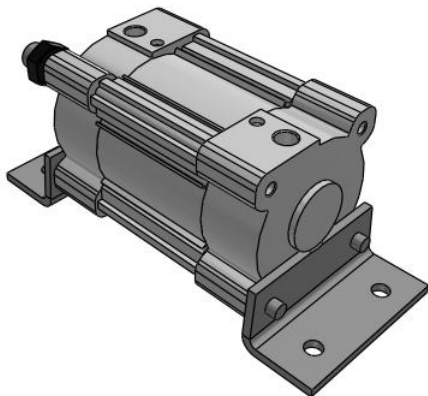

## CP96S(D) ø125, ISO Cylinder, Double Acting with End of Stroke Cushioning CP96SDL125-80

- Double acting, standard type, single or double rod
- Bore sizes (mm): 125
- Maximum stroke 2000mm
- Auto switch capable

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Magnet                          | D (Built-in)                              |
| Mounting                        | L (Axial Foot)                            |
| Bore Size                       | Ø125                                      |
| Stroke                          | 80                                        |
| Rod Boot                        | None                                      |
| Rod                             | Single Rod                                |
| Auto Switch                     | No Switch                                 |
| Lead Wire or Prewired Connector | 0.5m [Or None in the Case of No Switch]   |
| Number                          | 2 pcs. [Or None in the Case of No Switch] |
| Rod End Options                 | None                                      |
| Temperature Resistance          | None                                      |
| Tie Rod                         | None                                      |
| Fluororubber Seal               | None                                      |
| Made of Stainless Steel (-XC68) | None                                      |
| Made of Stainless Steel (-XC65) | None                                      |
| -                               | Compressed Air                            |
| Maximum operating pressure      | 1.0 MPa                                   |
| Minimum operating pressure      | 0.05 MPa                                  |
| Proof pressure                  | 1.5 MPa                                   |

|                             |                         |
|-----------------------------|-------------------------|
| Pneumatic input connection  | G 1/2                   |
| Pneumatic output connection | G 1/2                   |
| Maximum piston speed        | 700 mm/s                |
| Type of cushioning          | Both Ends (Air Cushion) |
| Piston rod end              | Male thread             |
| Male thread of rod end      | M27 x 2                 |
| Weight                      | 0.000 Kg                |



-

-

[CP96-Bb\\_EU.pdf](#)