


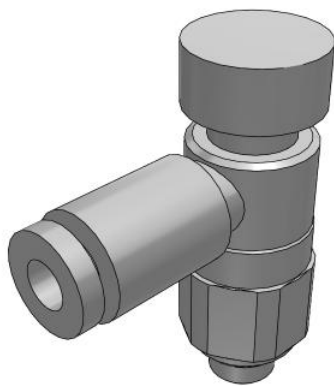

## Elbow - AS\*2\*1F-A AS1201F-M5-01A

### Datasheet

### General series information

- Port Size: M5, 10-32 UNF, 1/8, 1/4, 3/8, 1/2
- Applicable Tubing O.D.: Ø 2 to Ø 16 mm and Ø 1/8" to Ø 1/2"
- Operating Pressure Range: 0.1 to 1 MPa.




Speed controller, meter-out

### Standard specifications

|                                            |                                          |
|--------------------------------------------|------------------------------------------|
| Clean Series                               | None                                     |
| Body Size                                  | 1 (M5 X 0.8, 10-32UNF)                   |
| Type                                       | 2 (Elbow)                                |
| Control Type                               | 0 (Meter-out)                            |
| Thread Type                                | R or Metric                              |
| Port Size                                  | M5 (M5 X 0.8)                            |
| Across Flat [H]                            | Body Size 1: 9mm; Body Size 2, 3, 4 None |
| Applicable Tubing O.D.                     | 01 (Ø1/8)                                |
| Seal                                       | None                                     |
| Made to Order                              | None                                     |
| Pressure medium                            | Compressed air                           |
| Maximum temperature of pressure medium     | 60 °C                                    |
| Minimum temperature of pressure medium     | -5 °C                                    |
| Maximum operating pressure                 | 1 MPa                                    |
| Minimum operating pressure                 | 0.1 MPa                                  |
| Proof pressure                             | 1.5 MPa                                  |
| Maximum ambient temperature                | 60 °C                                    |
| Minimum ambient temperature                | -5 °C                                    |
| Critical pressure ratio                    | 0.2                                      |
| Sonic conductance dm <sup>3</sup> /(s·bar) | 0.3                                      |

|                            |          |
|----------------------------|----------|
| Number of needle rotations | 8        |
| Weight                     | 0.005 Kg |

Dimensions

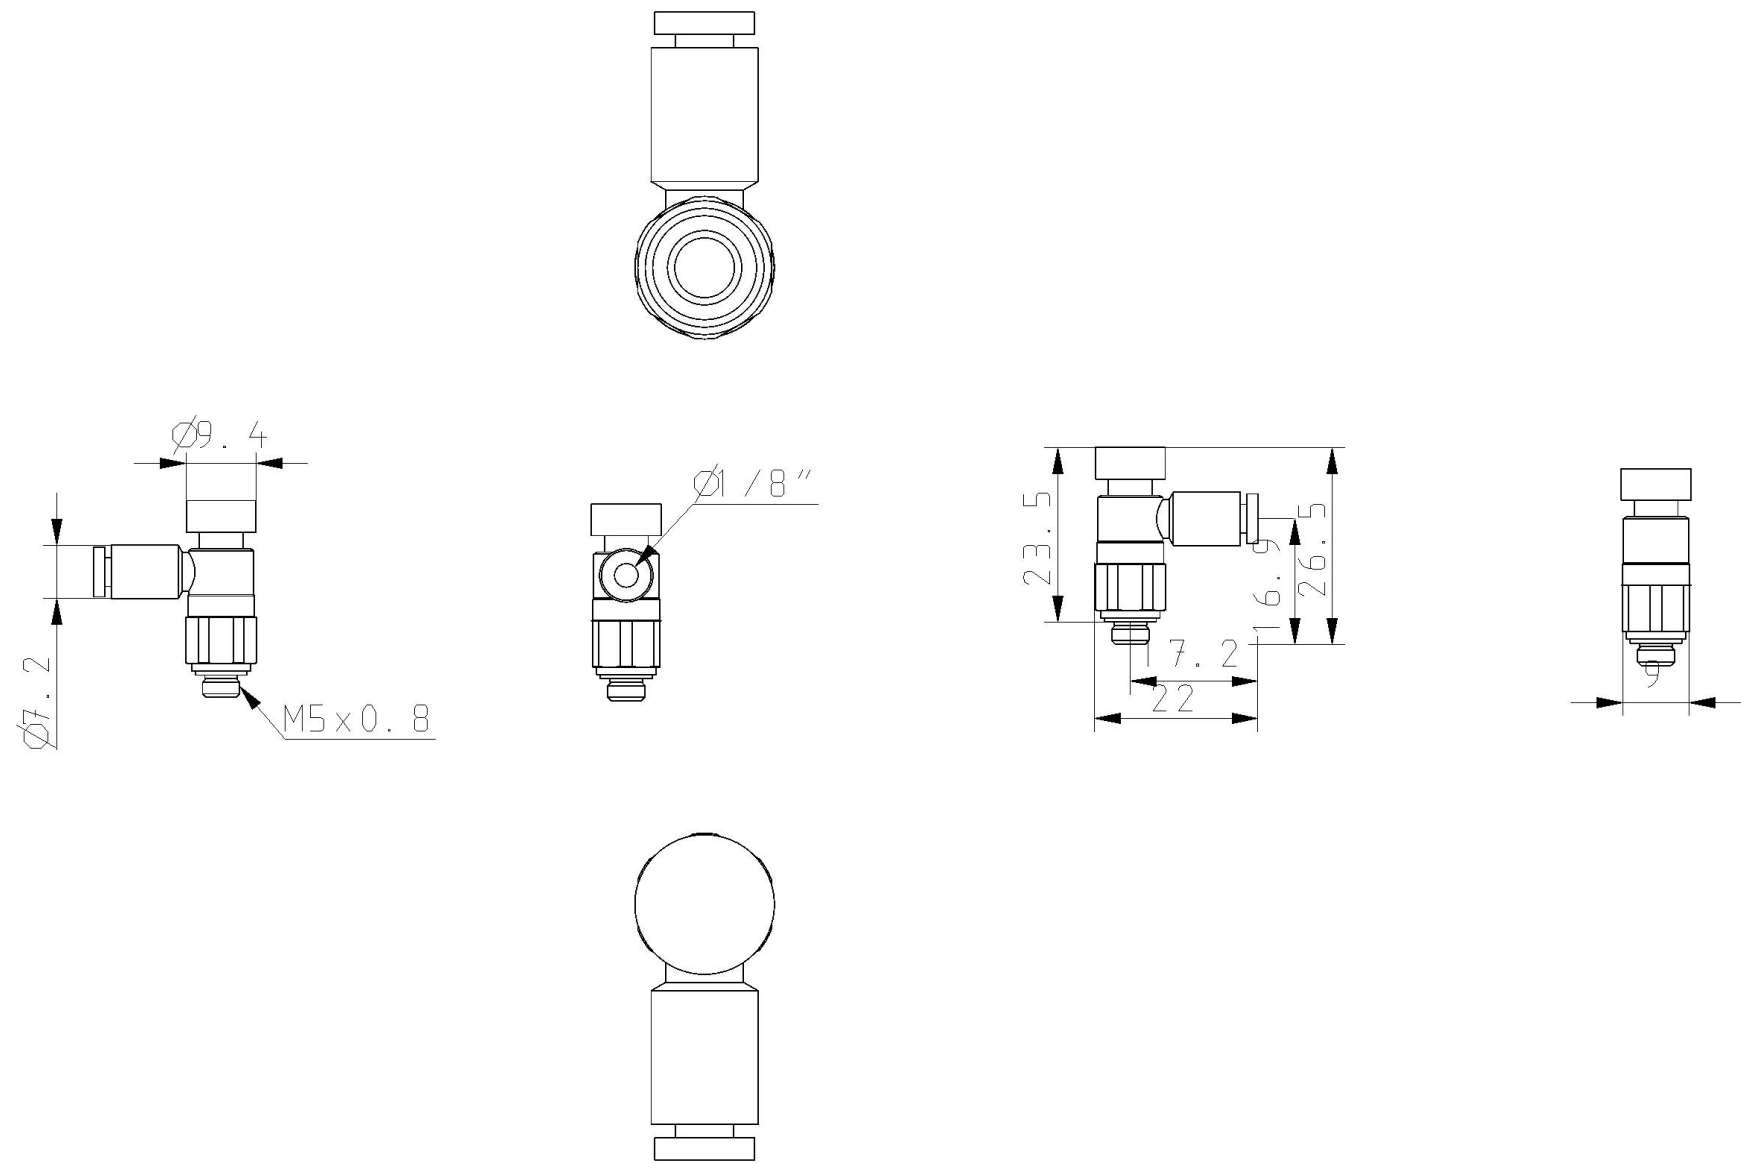

## Constructions



### Component Parts

| No. | Description  | Material            | Note                       |
|-----|--------------|---------------------|----------------------------|
| 1   | Body A       | PBT                 |                            |
| 2   | Body B       | Brass               | Electroless nickel plating |
| 3   | Knob         | POM                 |                            |
| 4   | Needle       | PBT                 |                            |
| 5   | Needle guide | Brass               | Electroless nickel plating |
| 6   | U-seal       | HNBR                |                            |
| 7   | O-ring       | NBR                 |                            |
| 8   | O-ring       | NBR                 |                            |
| 9   | Cassette     | —                   |                            |
| 10  | Seal         | NBR                 |                            |
| 11  | Gasket       | NBR/Stainless steel |                            |

## Additional information

Catalogue

[AS-1F\\_FG-A-Dd\\_EU.pdf](#)