


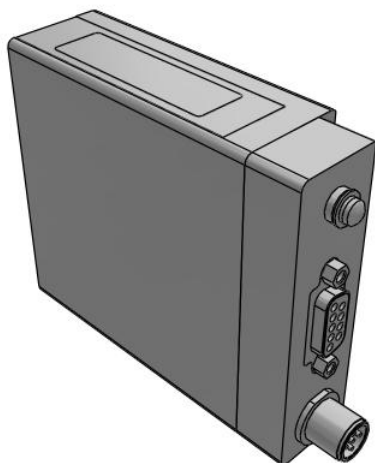

EX260, Integrated Type (For Output) Serial Transmission System EX260-SPR5

Datasheet


General series information

- Centralised & compact serial transmission system for output
- Compatible protocols: PROFI-safe, Ethernet POWERLINK, PROFINET, EtherNet/IP™, EtherCAT®, PROFIBUS DP, DeviceNet™, CC-Link, IO-Link, CANopen, Modbus, AS-Interface
- Up to 32 solenoids, up to 24 stations
- Applicable valve series: new SY, VQC, S0700, SV
- Up to IP67 enclosure compliant.

Standard specifications

Protocol/Number of outputs/Output Polarity/Communication Connector	PR5 [PROFIBUS DP / 32 / -COM (PNP) / D-Sub]
Maximum ambient temperature	50 °C
Minimum ambient temperature	-10 °C
General power supply	24 VDC
Approvals	CE marking, UL (CSA) compatible
Type of electrical connector	D-sub
Version	DP-V0
Number of outputs	32
SI unit output polarity	Source/PNP (Negative common)
Communication speed	9.6 k/19.2 k/45.45 k/93.75 k/ 187.5 k/500 k/1.5 M/3 M/6 M/12 Mbps
Enclosure	IP40
Weight	0.200 Kg

Dimensions

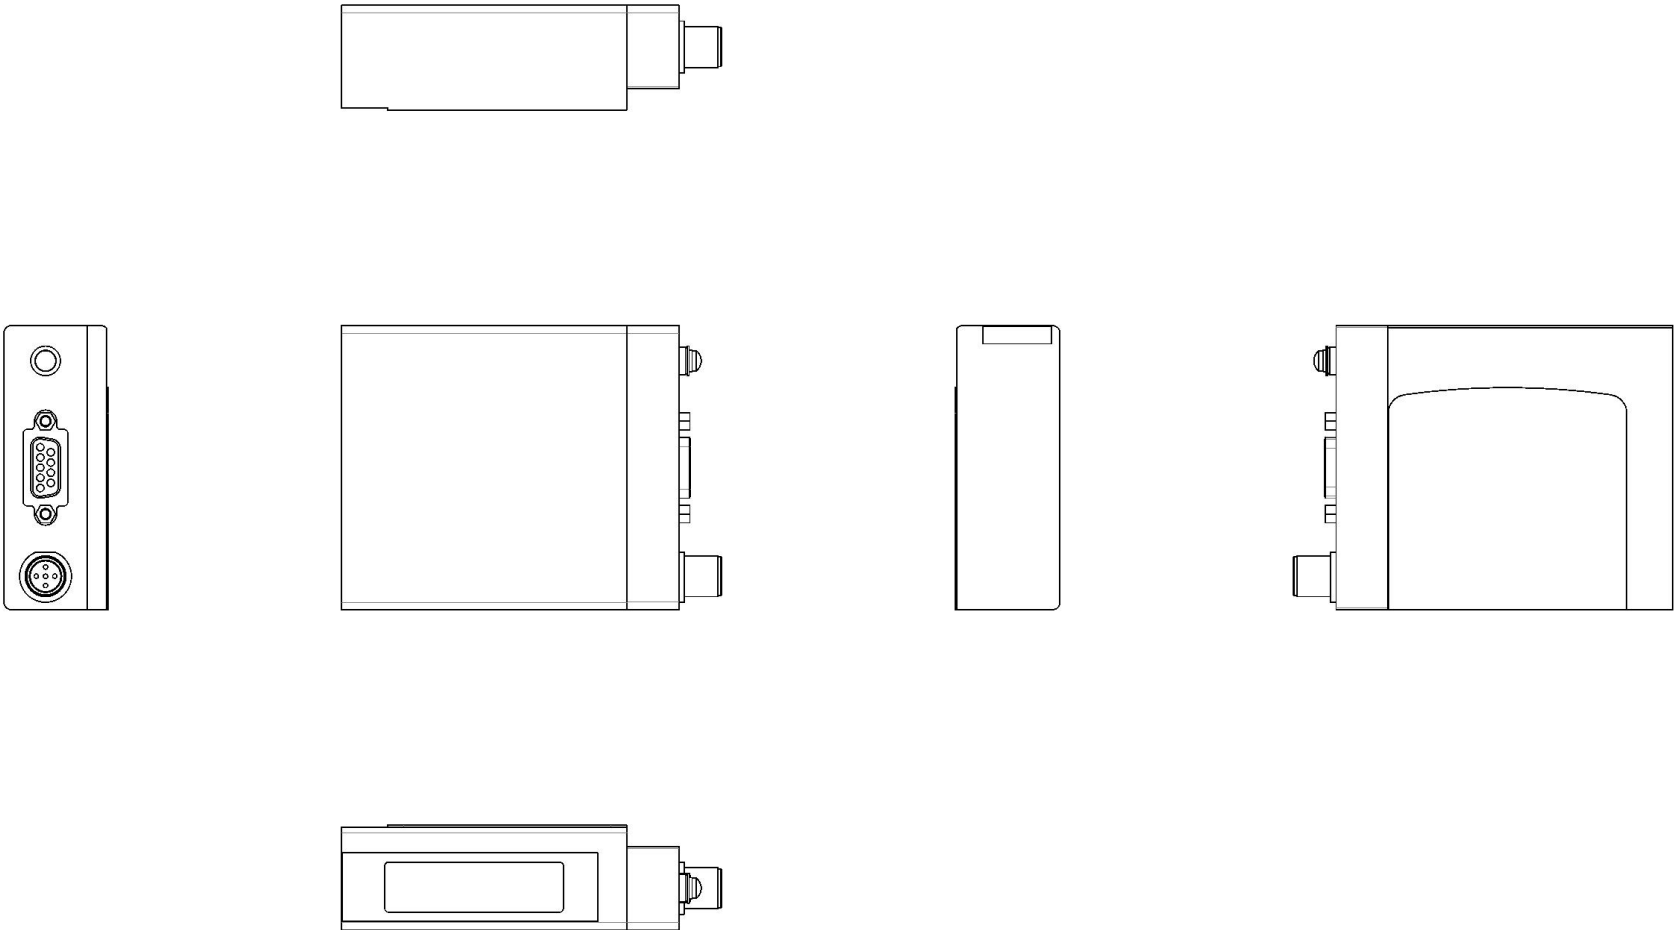

Additional information

Catalogue	EX260-E_EU.pdf
Declaration of conformity	newDoC_EX260_PROFIsafe_EN-C.pdf newDoC_EX260_PROFIBUS_DeviceNet_EtherCAT_PROFINET_EtherNetIP_EtherNet-POWERLINK_CC-Link_EN-A.pdf newDoC_EX260-S_M_V_P_TF124-174EN.pdf
Installation manuals	IM_EX260-SCT1_TF224-094EN-A.pdf IM_EX260_DeviceNet_EN-A.pdf IM_EX260_PROFINET_EN-A.pdf IM_EX260_EtherCAT_EN-A.pdf IM_EX260_EtherNet_POWERLINK_EN-A.pdf IM_EX260_IO-Link_EN-A.pdf IM_EX260_CC-Link_EN-A.pdf IM_EX260_EtherNetIP_EN-A.pdf IM_EX260-SPR_PROFIBUS_EN-A.pdf IM_EX260_PROFIsafe_EN-A.pdf
Operation manuals	OM_EX260_PROFIBUS_EN-H.pdf OM_EX260_IP_Address_Setting_Tool_EX9-ZSW-IPC1_EN-A.pdf OM_EX260_PROFINET_EN-F.pdf OM_EX260-IO-Link_EN-B.pdf OM_EX260-SDN_DeviceNet_EN-J.pdf OM_EX260_EtherNet_POWERLINK_EN-B.pdf OM_EX260_PROFIsafe_EN-A.pdf OM_EX260-SEN_EtherNetip_EN-G.pdf OM_EX260_IP_Address_Setting_Tool_EX9-ZSW-IPC2_EN-A.pdf OM_EX260-SEC_EtherCAT_EN-G.pdf OM_EX260-CC-Link_EN-J.pdf
05/01/2026	