


IS10E, Pressure Switch with Piping Adapter

IS10E-20F01-6L

Datasheet

General series information

- Can be connected to modular type FRL units
- 100V AC/DC specifications
- Service life: 5 million cycles
- RoHS compliant & CE marked









Adjustable pressure switch

Standard specifications

Size	20
Thread	F (G)
Port Size	01 (1/8)
Options	6L (6 + L)
Maximum operating pressure	0.7 MPa
Proof pressure	1.0 MPa
Approvals	CE
Enclosure	IP40
Repeatability	±0.05 MPa
Applicable fluid	Air/Inert gas
Operating temperature range	–5 - 60°C
Hysteresis	Fixed 0.08 MPa or less
Contacts	1a
Error of scale	±0.05 MPa
Weight	0.062 Kg

Dimensions

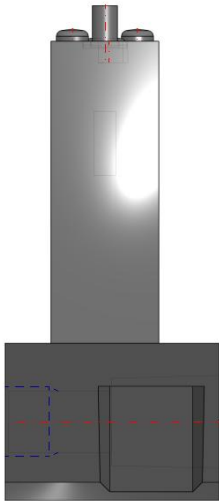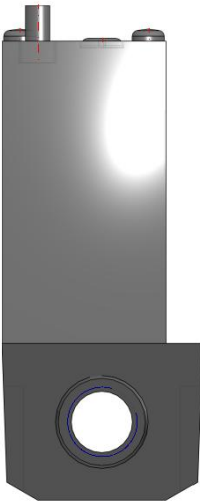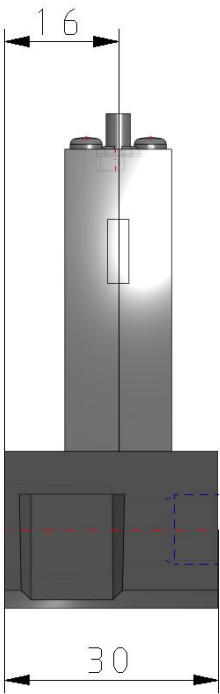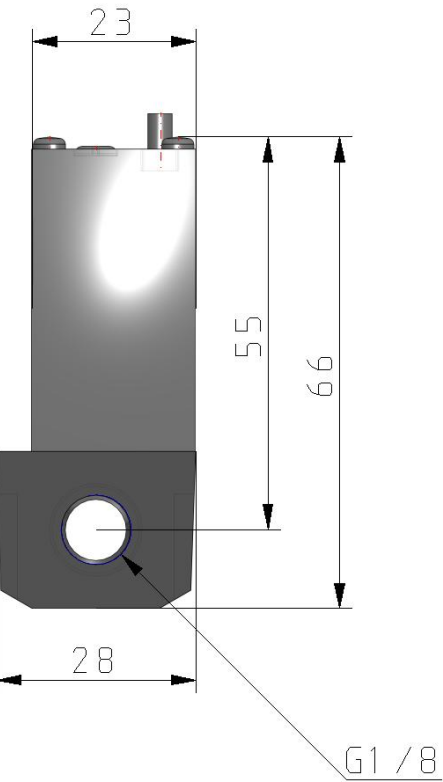

Additional information

Catalogue	IS10-A_EU.pdf
Declaration of conformity	newDoC_IS10_TF122122EN.pdf newDoC_IS10_TF1V346EN.pdf
Installation manuals	IM_IS10_SMW02EN.pdf
Operation manuals	OM_IS10_IS-OMO0044EN.pdf