


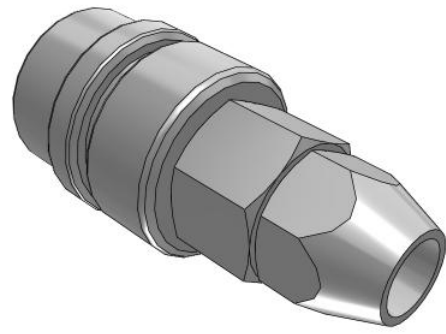


KKH*S-*N, S-Couplers, Nut Fitting KKH4S-65N

Datasheet

- S coupler for general purpose with Socket
- Thread, sizes: R, Rc, from 1/8 to 1/2
- Fluid temperature: -5 to 60 °C, water: 0 to 40 °C
- Able to absorb ultra-high impact: PBT resin
- Without sleeve lock mechanism.

Body Size	4 (1/4)
Applicable Hose I.D./O.D.	6.5/10 mm
Pressure medium	Air, Water
Maximum operating pressure	0 - 1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C / 40 °C for Water
Minimum ambient temperature	-5 °C (with no freezing) / 5 °C for Water
Effective Area	39 mm ²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Connection plug	Series KK plug

Dimensions

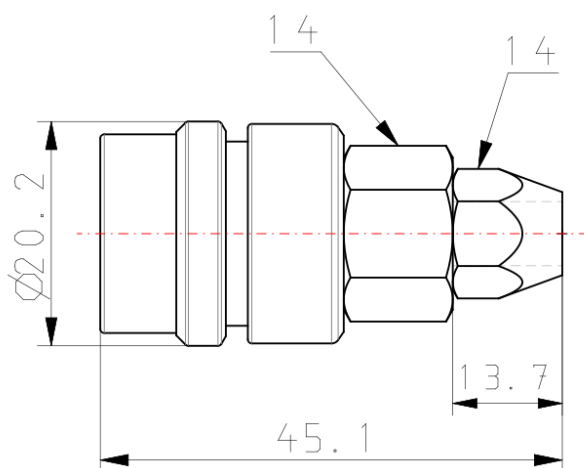

Additional information

Catalogue

[KK-C_EU.pdf](#)