


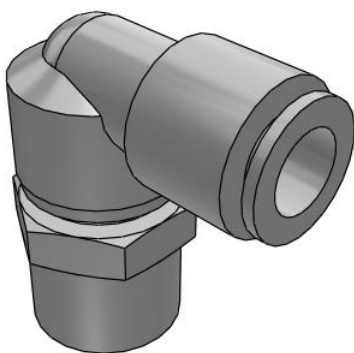

## Metric - KS KSL10-04S

### Datasheet


### General series information


- Rotary, One-touch fitting (standard)
- Metric threads
- Tube OD: Ø4, Ø6, Ø8, Ø10, Ø12
- Maximum operating pressure: 1.0 MPa
- Ambient & fluid temperature: -5 to 60°C

### Standard specifications

|                             |                                 |
|-----------------------------|---------------------------------|
| Model                       | L (Male Elbow)                  |
| Applicable Tube OD          | Ø10 mm                          |
| Port Size                   | 04 (R[PT] 1/2)                  |
| Sealant                     | S [Sealant]                     |
| Pressure medium             | Air                             |
| Maximum ambient temperature | 60 °C                           |
| Minimum ambient temperature | -5 °C (no Freezing)             |
| Usable tubing material      | Nylon, Soft nylon, Polyurethane |
| Weight                      | 0.082 Kg                        |

## Dimensions

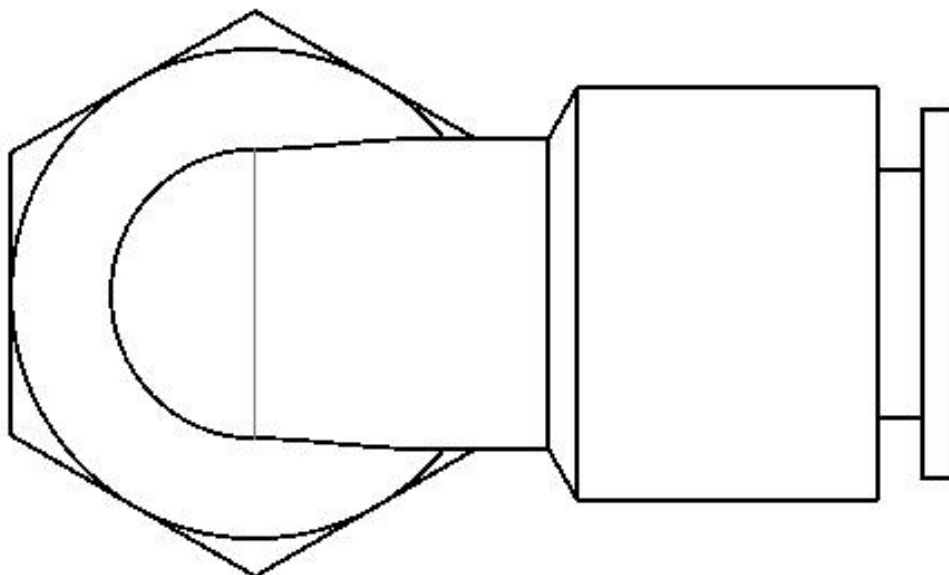

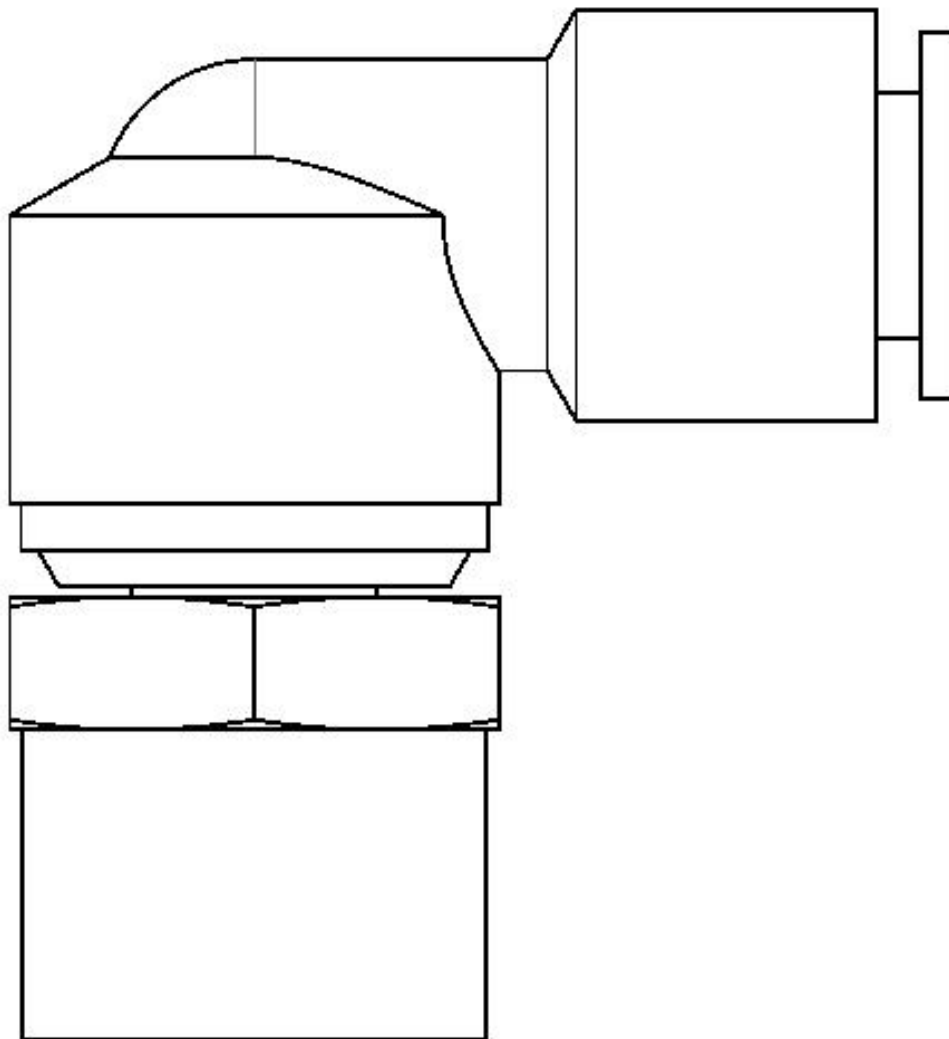

## Additional information

Catalogue

[KS\\_KX\\_EU.pdf](#)