


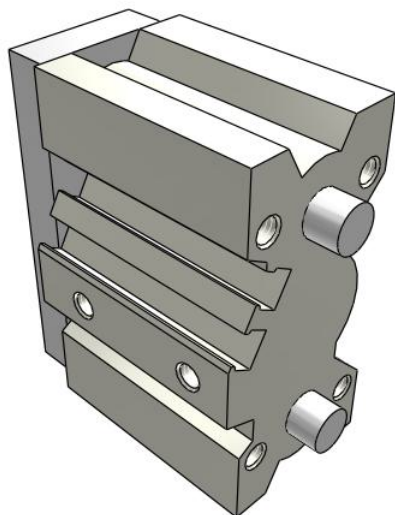

MGQL (ø12 to ø32), Compact Guide Cylinder, Ball Bushing Bearing MGQL16-5

Datasheet


General series information

- Compact guide cylinder
- Ball bushing bearing
- Bore sizes: 12, 16, 20, 25, 32 (mm)
- Strokes from 1mm through 200mm depending upon bore size
- Variety of switches and a variety of lead wire lengths.

Standard specifications

Bore Size	16 mm
Thread Type	Metric (Bore Ø12 to Ø16) and Rc(PT)
Stroke	5
Auto Switch	No Switch
Lead Wire or Pre-wired Connector	0.5 m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Pressure medium	Air
Maximum temperature of pressure medium	60 °C
Maximum temperature of pressure medium with magnet	-10 °C (No freezing)
Maximum ambient temperature	60 °C
Minimum ambient temperature	-10 °C (No freezing)
Number of pneumatic connections	2 pcs.
Mode of operation of drive	Double acting
Weight	0.351 Kg

Dimensions

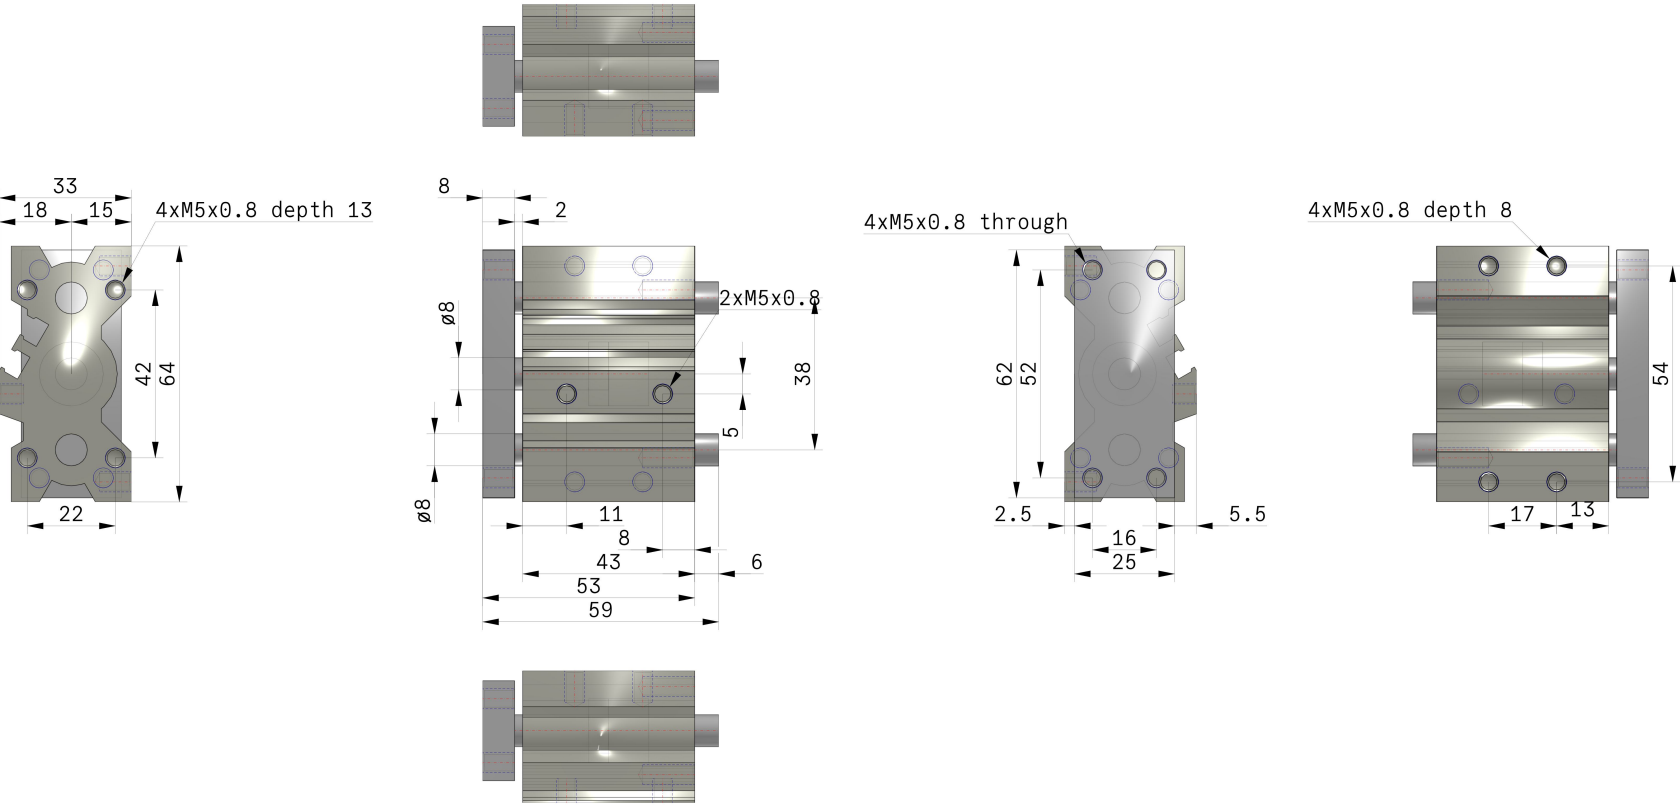

Additional information

Catalogue

[MGQ_EU.pdf](#)