



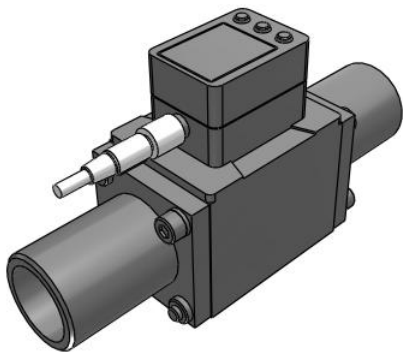

PF3W7-U, Digital Flow Switch for PVC Piping, 3-Colour Display, Integrated display PF3W711-U25-A-M

Datasheet

- Digital Flow Switch for PVC Piping
- Compact size.
- Rotary display.
- Display visibility improved.
- Built-in temperature sensor.
- IP65, RoHS Compliant & CE Compliant.




Flow meter with digital display

Standard specifications

Rated Flow Range	11 (10 to 100 l/min)
PVC pipe O.D.	25A (ø32)
Output Specification	A (OUT1: NPN - OUT2: NPN)
Lead Wire	With Lead Wire, With M8 Connector
Integrated display/Unit specification	M (Flow Rate: l/min, Temperature: °C)
Bracket	None
Calibration Certificate	None
General power supply	12 - 24 VDC ±10 %
Internal voltage drop	1 V or less (at load current of 80 mA)
Current consumption	50 mA or less
Enclosure	IP65
Applicable fluid	Water and ethylene glycol aqueous solution (with viscosity of 3 mPa·s [3 cP] or less)
Flow display range	7 to 140 l/min (Flow under 7 l/min is displayed as "0")
Accuracy	Display value: ±3 % F.S. Analogue output: ±3 % F.S.
Hysteresis mode	Variable
Display	2-screen display (Main screen: 4-digit, 7-segment, 2-colour, Red/Green Sub screen: 6-digit, 11-segment, White) Display values updated 5 times per second


Indicator light	Output 1, Output 2: Orange
Insulation resistance	50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing
Flow detection method	Karman vortex
Fluid temperature	0 to 70 °C (No freezing or condensation)
Conversion of accumulated pulse (Pulse width: 50 ms)	1 L/pulse
Display unit	Instantaneous flow: l/min, Accumulated flow: L
Accumulated flow range	999999999 L
Accumulated flow range increment	By 1 L
Analogue output response time	0.5 s/1 s/2 s (linked with the switch output)
Weight	0.370 Kg

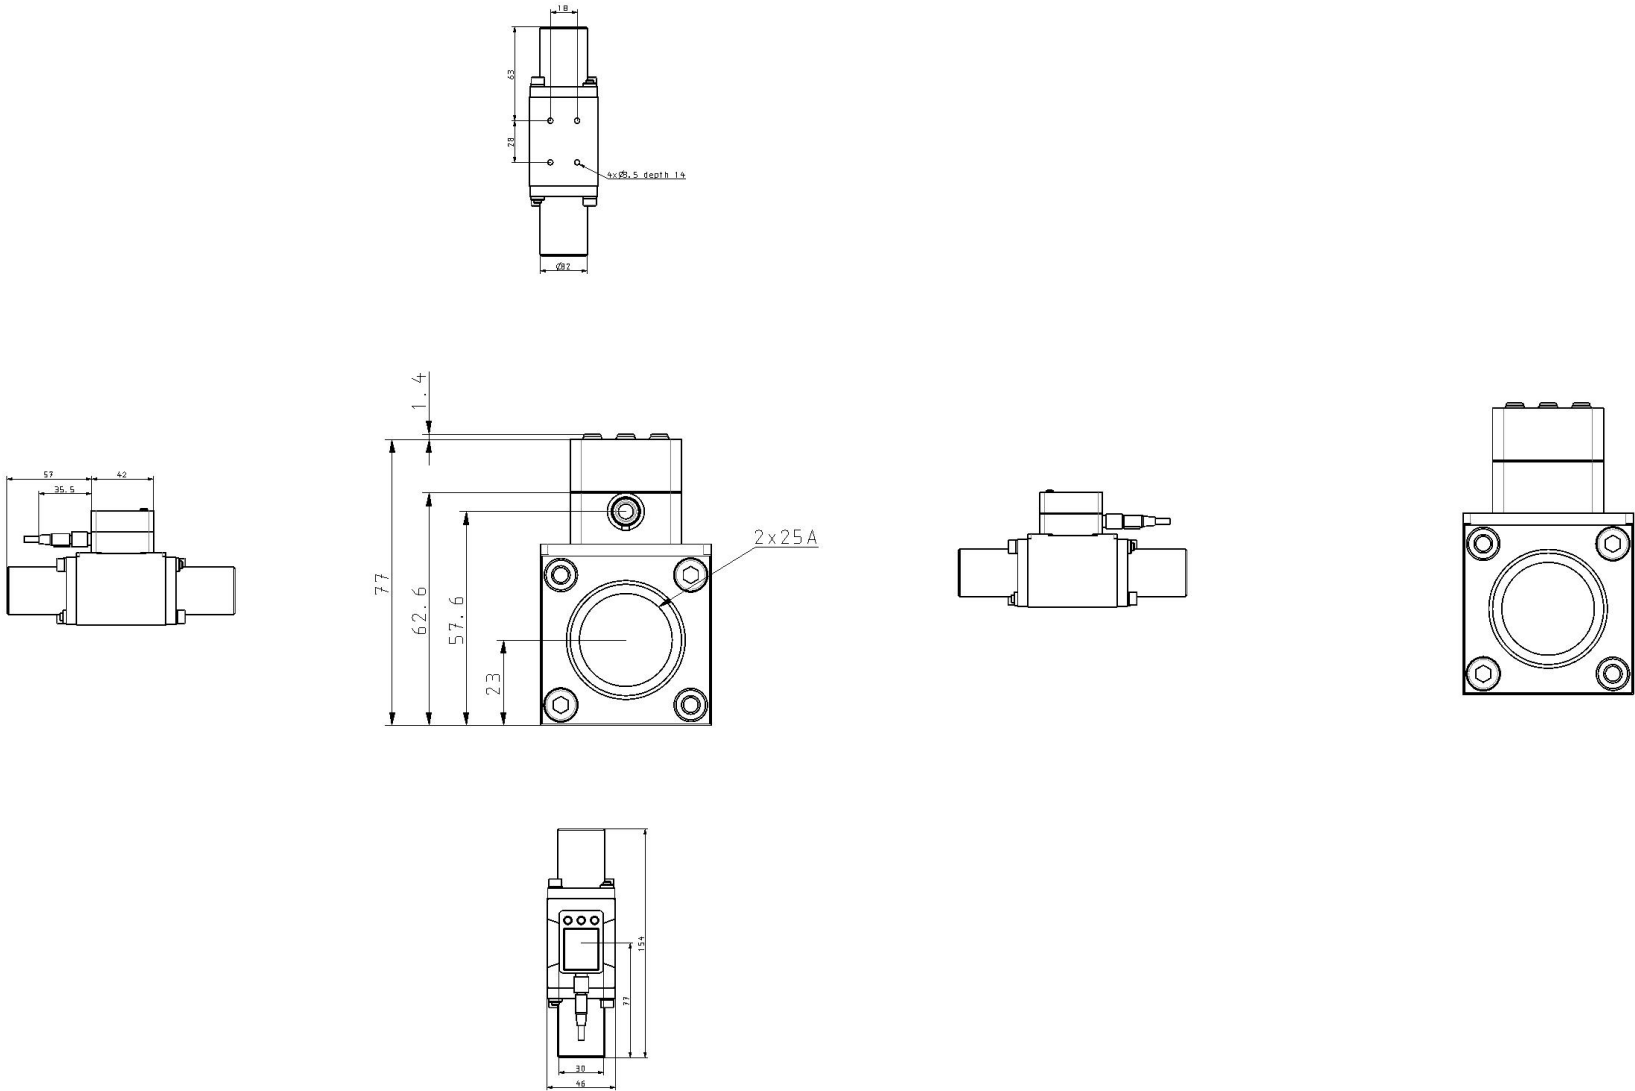

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Constructions

*This construction image does not include the display

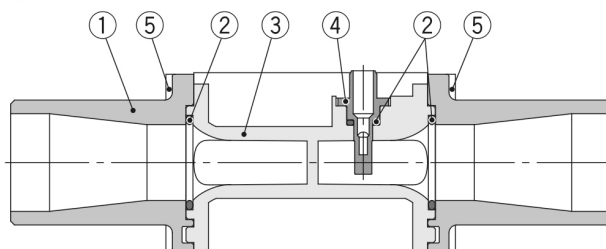

Component Parts

No.	Description	Material	Note
1	PVC pipe	CPVC	
2	Seal	FKM	
3	Body	PPS	
4	Sensor	PPS	

Replacement Parts

No.	Description	Part no.	Qty.
1	PVC pipe (25A)	ZS-40-U25	1
	PVC pipe (30A)	ZS-40-U30	1
5	25A retaining plate (With two M5 x 80 hexagonal socket head cap screws)	ZS-40-U25-A	1
	30A retaining plate (With two M5 x 65 hexagonal socket head cap screws)	ZS-40-U30-A	1

* Replacing the PVC pipe may cause accuracy to fluctuate by 1 to 2 %.

Additional information

Catalogue	PF3W-D_EU.pdf
Declaration of conformity	newDoC_PF3W_TF1Y123EN.pdf newDoC_PF3W_TF1V119EN-A.pdf
Installation manuals	IMM_PF3W7xx_TFN16GB-A.pdf
Operation manuals	OM_PF3W7x_PF-OMM0005EN-N.pdf