


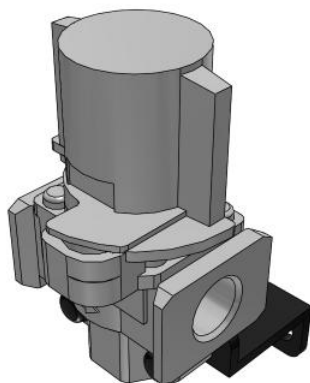


## Single Action - VHS VHS20-02A-BS

### Datasheet

### General series information

- **This product is being discontinued and will be replaced by VHS-D series. Update details [here](#).**
- Modular connection type for connecting to FRL units
- Flow rate up to 8270 l/min
- Energy saving: zero air bleeding while switching the handle
- OSHA standard compliant (US standard)
- With built-in silencer for EXH port as an option.




Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control


### Standard specifications

|                             |                                              |
|-----------------------------|----------------------------------------------|
| Body Size                   | 20                                           |
| Thread                      | Rc                                           |
| Port Size                   | 02 (1/4)                                     |
| Handle/Bonnet Material      | A (Flame Resistant PBT)                      |
| Options                     | BS (w/Bracket + Built-in Silencer, EXH Port) |
| Semi-standard               | None                                         |
| Made to Order               | None                                         |
| Pressure medium             | Air;Air                                      |
| Maximum operating pressure  | 1.0 MPa                                      |
| Minimum operating pressure  | 0.01 MPa                                     |
| Proof pressure              | 1.5 MPa                                      |
| Maximum ambient temperature | 60 °C;60 °C                                  |
| Minimum ambient temperature | -5 °C (No freezing);-5 °C (No freezing)      |
| Approvals                   | No need;No need                              |
| Paint colour                | Handle: Red<br>Body: White                   |
| Handle switching angle      | 90°                                          |

|        |          |
|--------|----------|
| Weight | 0.108 Kg |
|--------|----------|

## Dimensions

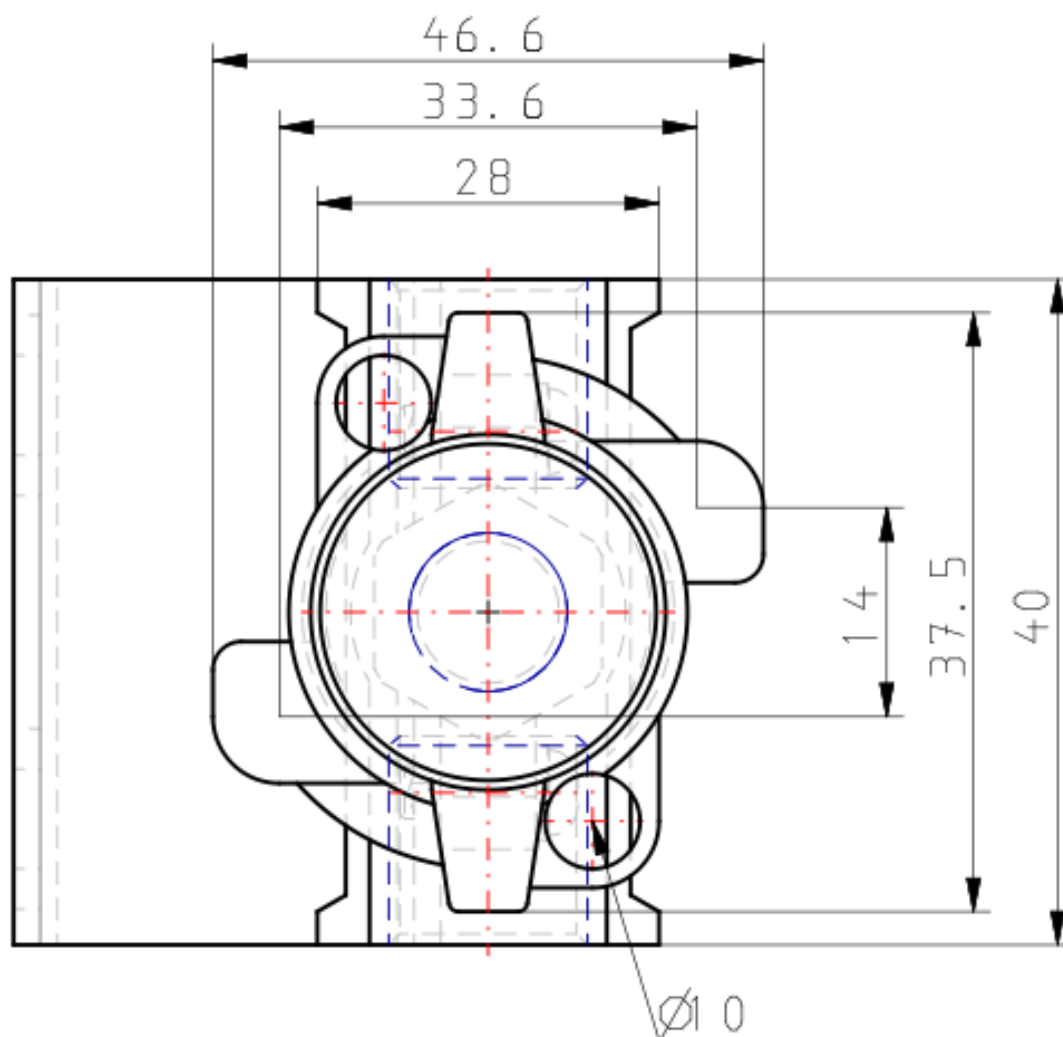

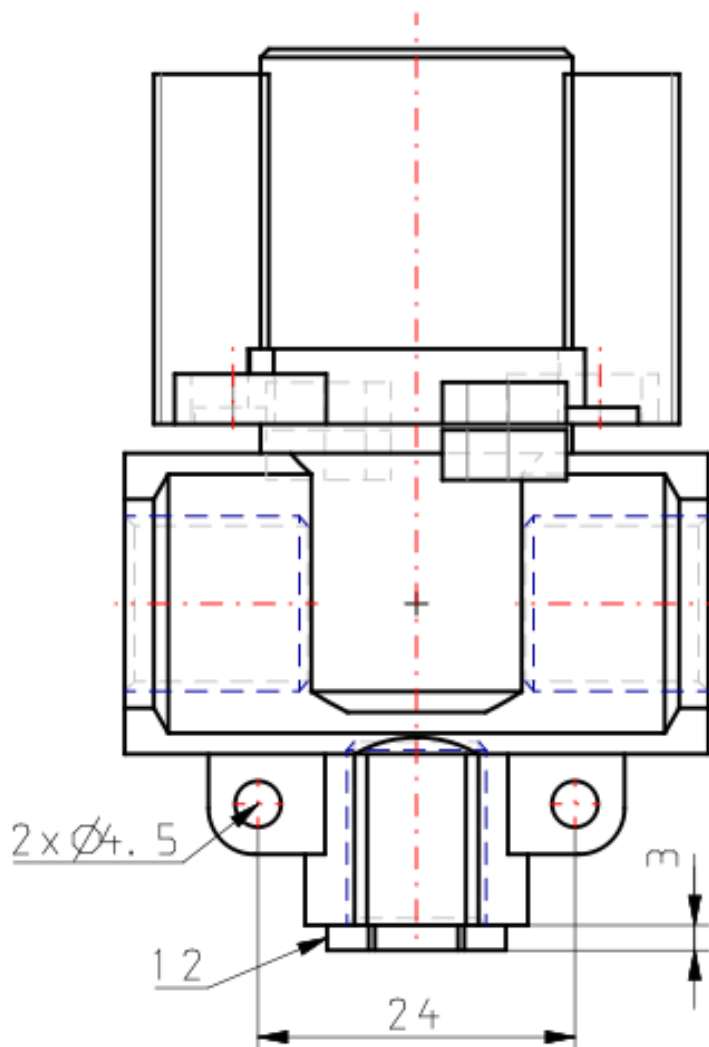

## Additional information

|                           |                                              |
|---------------------------|----------------------------------------------|
| Catalogue                 | <a href="#">VHS-A_EU.pdf</a>                 |
| Declaration of conformity | <a href="#">newDoc_VHS-A_TF1V403EN-A.pdf</a> |
| Operation manuals         | <a href="#">OM_VHS_OMQ0023EN-D.pdf</a>       |