




Single Action - VHS VHS20-F01A-BS

Datasheet

- With locking holes
- Port sizes: 1/8, 1/4, 3/8, 1/2, 3/4, 1"
- Thread Types: Rc, NPT, G.




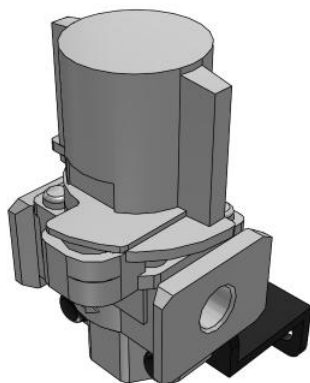


Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control

Standard specifications

Body Size	20
Thread	F (G)
Port Size	01 (1/8)
Handle/Bonnet Material	A (Flame Resistant PBT)
Options	BS (w/Bracket + Built-in Silencer, EXH Port)
Semi-standard	None
Made to Order	None
Pressure medium	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.01 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (No freezing)
Conform to the European RoHS Directive	Conform
Approvals	No need
Paint colour	Handle: Red Body: White
Handle switching angle	90°
Weight	0.110 Kg

Dimensions

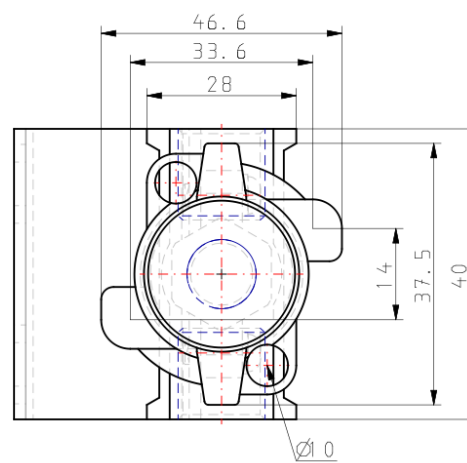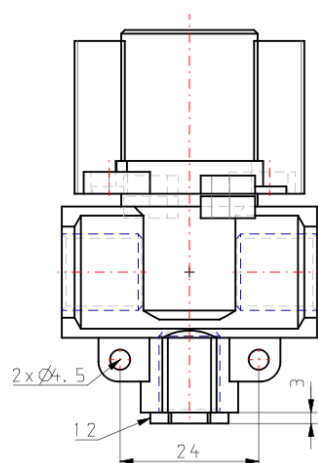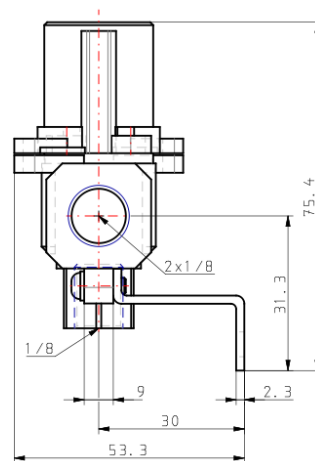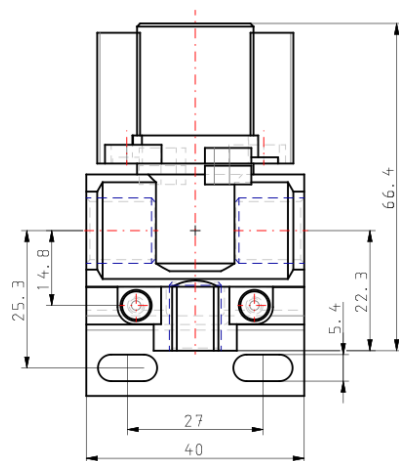

Additional information

Catalogue	VHS-A_EU.pdf
Declaration of conformity	newDoc_VHS-A_TF1V403EN-A.pdf
Operation manuals	OM_VHS_Q0023EN-B.pdf