



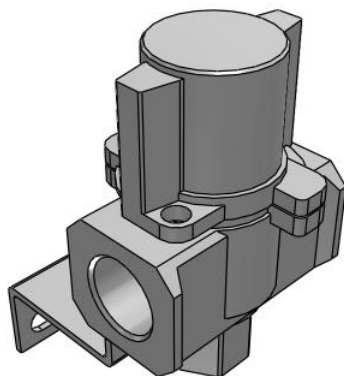

Single Action - VHS VHS50-F10B-B

Datasheet

- Modular connection type for connecting to FRL units
- Flow rate up to 8270 l/min
- Energy saving: zero air bleeding during switching the handle
- Safety measure: prevention of accidents caused by inadvertent air supply problems (OSHA standard compliant)
- With built-in silencer for EXH port as an option.






*Directional control valve 3/2-way valve, closed
normal position With mechanical control
spring, with mechanical component detent
control Return with general manual control*

Standard specifications

Body Size	50
Thread	F (G)
Port Size	10 (1)
Handle/Bonnet Material	B (Aluminum)
Options	B (With bracket)
Semi-standard	None
Made to Order	None
Pressure medium	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.01 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (No freezing)
Approvals	No need
Paint colour	Handle: Red Body: White
Handle switching angle	90°
Weight	0.833 Kg

Dimensions

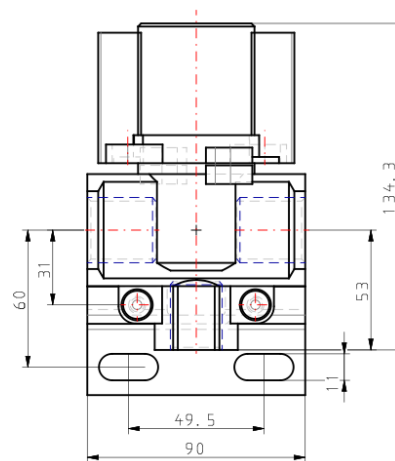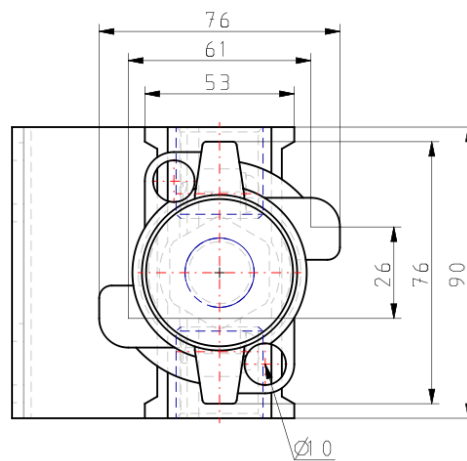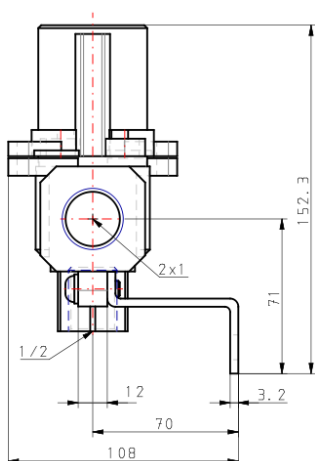

Additional information

Catalogue	VHS-A_EU.pdf
Declaration of conformity	newDoc_VHS-A_TF1V403EN-A.pdf
Operation manuals	OM_VHS_Q0023EN-B.pdf