


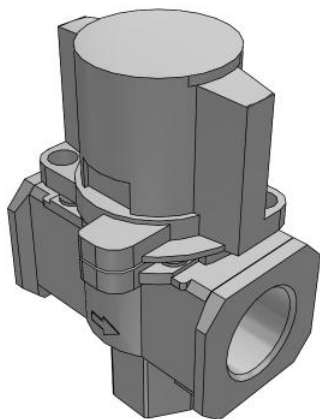


Single Action - VHS VHS50-N10A-Z

Datasheet

General series information

- Modular connection type for connecting to FRL units
- Flow rate up to 8270 l/min
- Energy saving: zero air bleeding while switching the handle
- Safety measure: prevention of accidents caused by inadvertent air supply problems (OSHA standard compliant)
- With built-in silencer for EXH port as an option.






Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control

Standard specifications

Body Size	50
Thread	N (NPT)
Port Size	10 (1)
Handle/Bonnet Material	A (Flame Resistant PBT)
Options	None
Semi-standard	Z (psi as Unit Displayed on Label)
Made to Order	None
Pressure medium	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.01 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (No freezing)
Approvals	No need
Paint colour	Handle: Red Body: White
Handle switching angle	90°
Weight	0.488 Kg

Dimensions

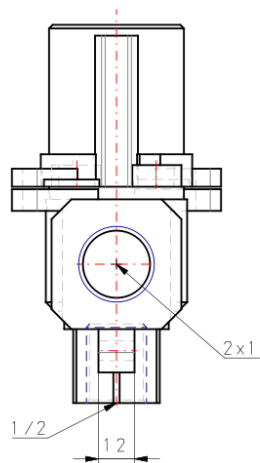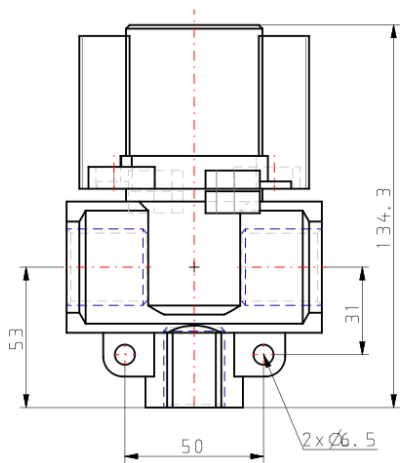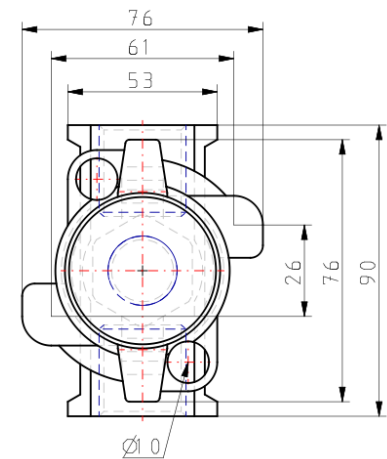

Additional information

Catalogue	VHS-A_EU.pdf
Declaration of conformity	newDoc_VHS-A_TF1V403EN-A.pdf
Operation manuals	OM_VHS_Q0023EN-B.pdf