


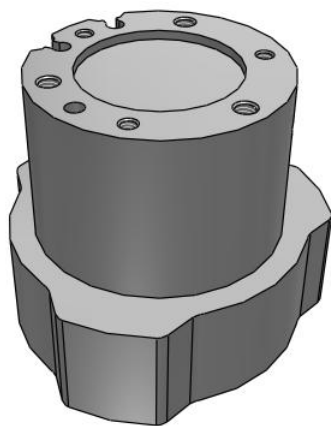

Standard with Dust Cover - MHSJ3 MHSJ3-32D

Datasheet

General series information

- Maximum gripping force 525 N at 0.5 MPa
- Double acting
- Repeatability: ± 0.01 mm
- Max. operating frequency: 120 c.p.m.



Gripper, internal grip, double-acting with permanent magnet on piston







Standard specifications

Bore Size	32 mm
Port Thread	Bore 16-63: M Thread; Bore 80: Rc
Dust Cover	Chloroprene Rubber
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Suffix for Auto Switch	2 pcs (Or None in the Case of No Switch)
Special Specifications	None
Maximum operating pressure	0.6 MPa
Minimum operating pressure	0.1 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-10 °C
Repeatability	± 0.01 mm
Lubrication	Non-lube
Effective holding force per finger, external (0.5 MPa)	62 N
Effective holding force per finger, internal (0.5 MPa)	82 N
Maximum operating frequency	60 c.p.m.
Fluid	Air
Action	Double Acting
Stroke per gripper jaw	8 mm


Weight	0.440 Kg
--------	----------

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.


Dimensions

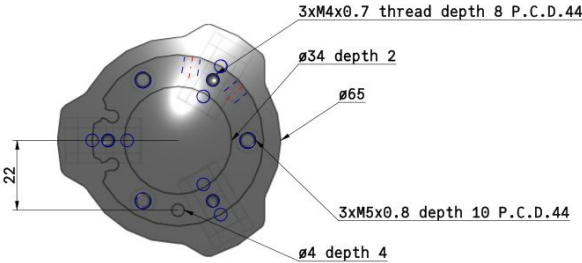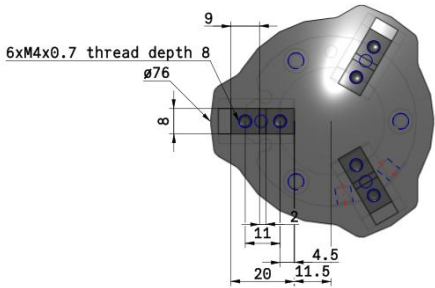


Constructions

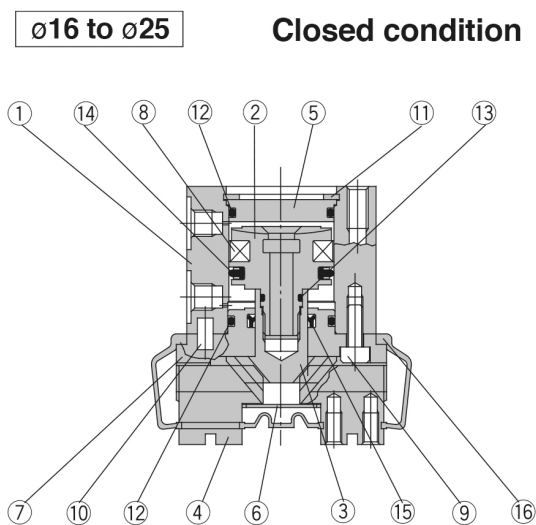

Open condition



ø32 to ø80 **Open condition**

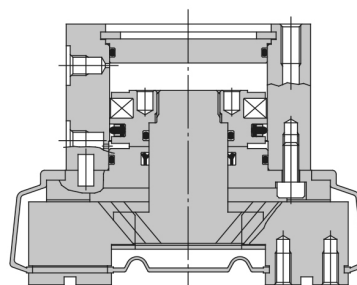

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	ø16 to ø25: Stainless steel ø32 to ø80: Aluminum alloy	Hard anodized
3	Cam (J)	Carbon steel	Heat treated, Specially treated
4	Finger	Carbon steel	Heat treated, Specially treated
5	Cap (J)	Aluminum alloy	Hard anodized
6	End plate (J)	Stainless steel	
7	Guide	Aluminum alloy	Hard anodized

No.	Description	Material	Note
8	Rubber magnet	Synthetic rubber	
9	Hexagon socket head screw	Carbon steel	Nickel plated
10	Parallel pin	Stainless steel	
11	C type snap ring	Carbon steel	Nickel plated
12	Gasket	NBR	
13	Gasket	NBR	
14	Piston seal	NBR	
15	Rod seal	NBR	

Additional information

Catalogue

[MHS_EU.pdf](#)