

## Universal - AS\*3\*1F AS2311F-01-06S

### Datasheet







### General series information

- Port Size: M3, M5, 10-32 UNF, 1/8, 1/4, 3/8, 1/2
- Applicable Tubing O.D.: Ø 3.2 to Ø 12 mm and Ø 1/8" to Ø 1/2"
- Operating Pressure Range: 0.1 to 1 MPa.

### Standard specifications

|                |                    |
|----------------|--------------------|
| Size           | 2 (1/8, 1/4 Basis) |
| Style          | 3 (Universal)      |
| Control Method | 1 (Meter-in)       |
| Thread         | M3, M5, U10/32, Rc |
| Port Size      | 01 (1/8)           |
| Tube Size      | Ø6                 |
| Option         | S (Sealant)        |
| Fixed Orifice  | None               |
| Made to Order  | None               |
| Lock Nut       | Standard (Hexagon) |
| Weight         | 0.018 Kg           |

Dimensions

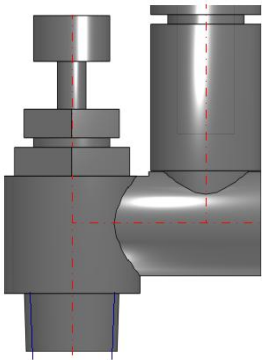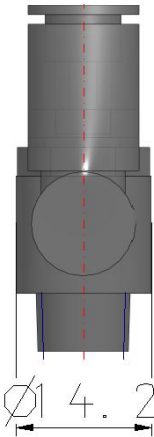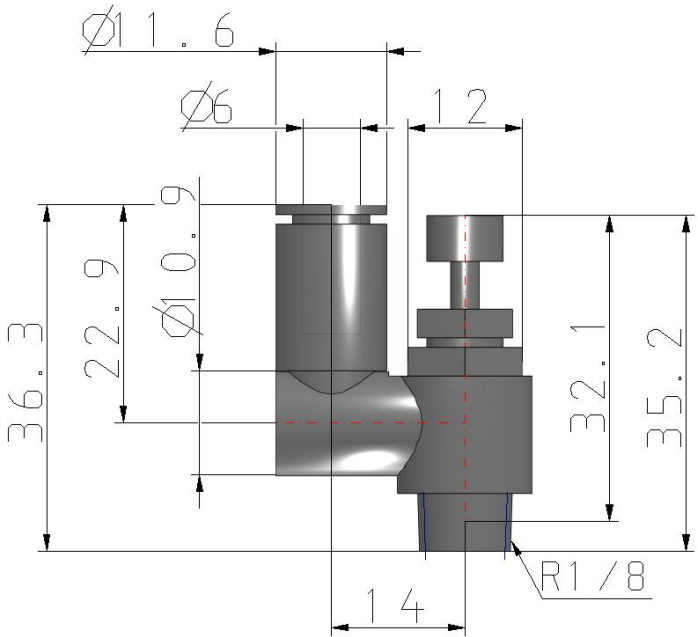

## Additional information

Catalogue

[AS\\_2-3\\_1F-A\\_EU.pdf](#)