




VM200, 200 Series 2/3 Port Mechanical Valve VM220-02-07SA

Datasheet

General series information

- Fluid: Air/Inert gas.
- Large flow capacity.
- Possible to choose mounting method with side ported.
- Variety of actuator types.



*Directional control valve 2/2-way valve, closed
normal position With mechanical control roller
Return with mechanical control spring*


Standard specifications

Number of Ports	2 Port
Body Option	Side Mounting
Port Size	02 (R 1/4)
Actuator type	07 (Cross Roller Plunger)
Suffix	S (Hard Steel Roller)
Bracket	None
Pressure medium	Air/Inert gas
Maximum temperature of pressure medium	60 °C
Minimum temperature of pressure medium	-5 °C (No freezing)
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (No freezing)
Pneumatic input connection	R 1/4
Pneumatic exhaust connection	R 1/4
Function in normal position	Closed
Type of piloting	Directly
Valve return	Mechanical spring
Flow rate	1088 l/min

Critical pressure ratio	0.4
Sonic conductance dm3/(s·bar)	4
Actuation type	Mechanically
Weight	0.230 Kg


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Dimensions

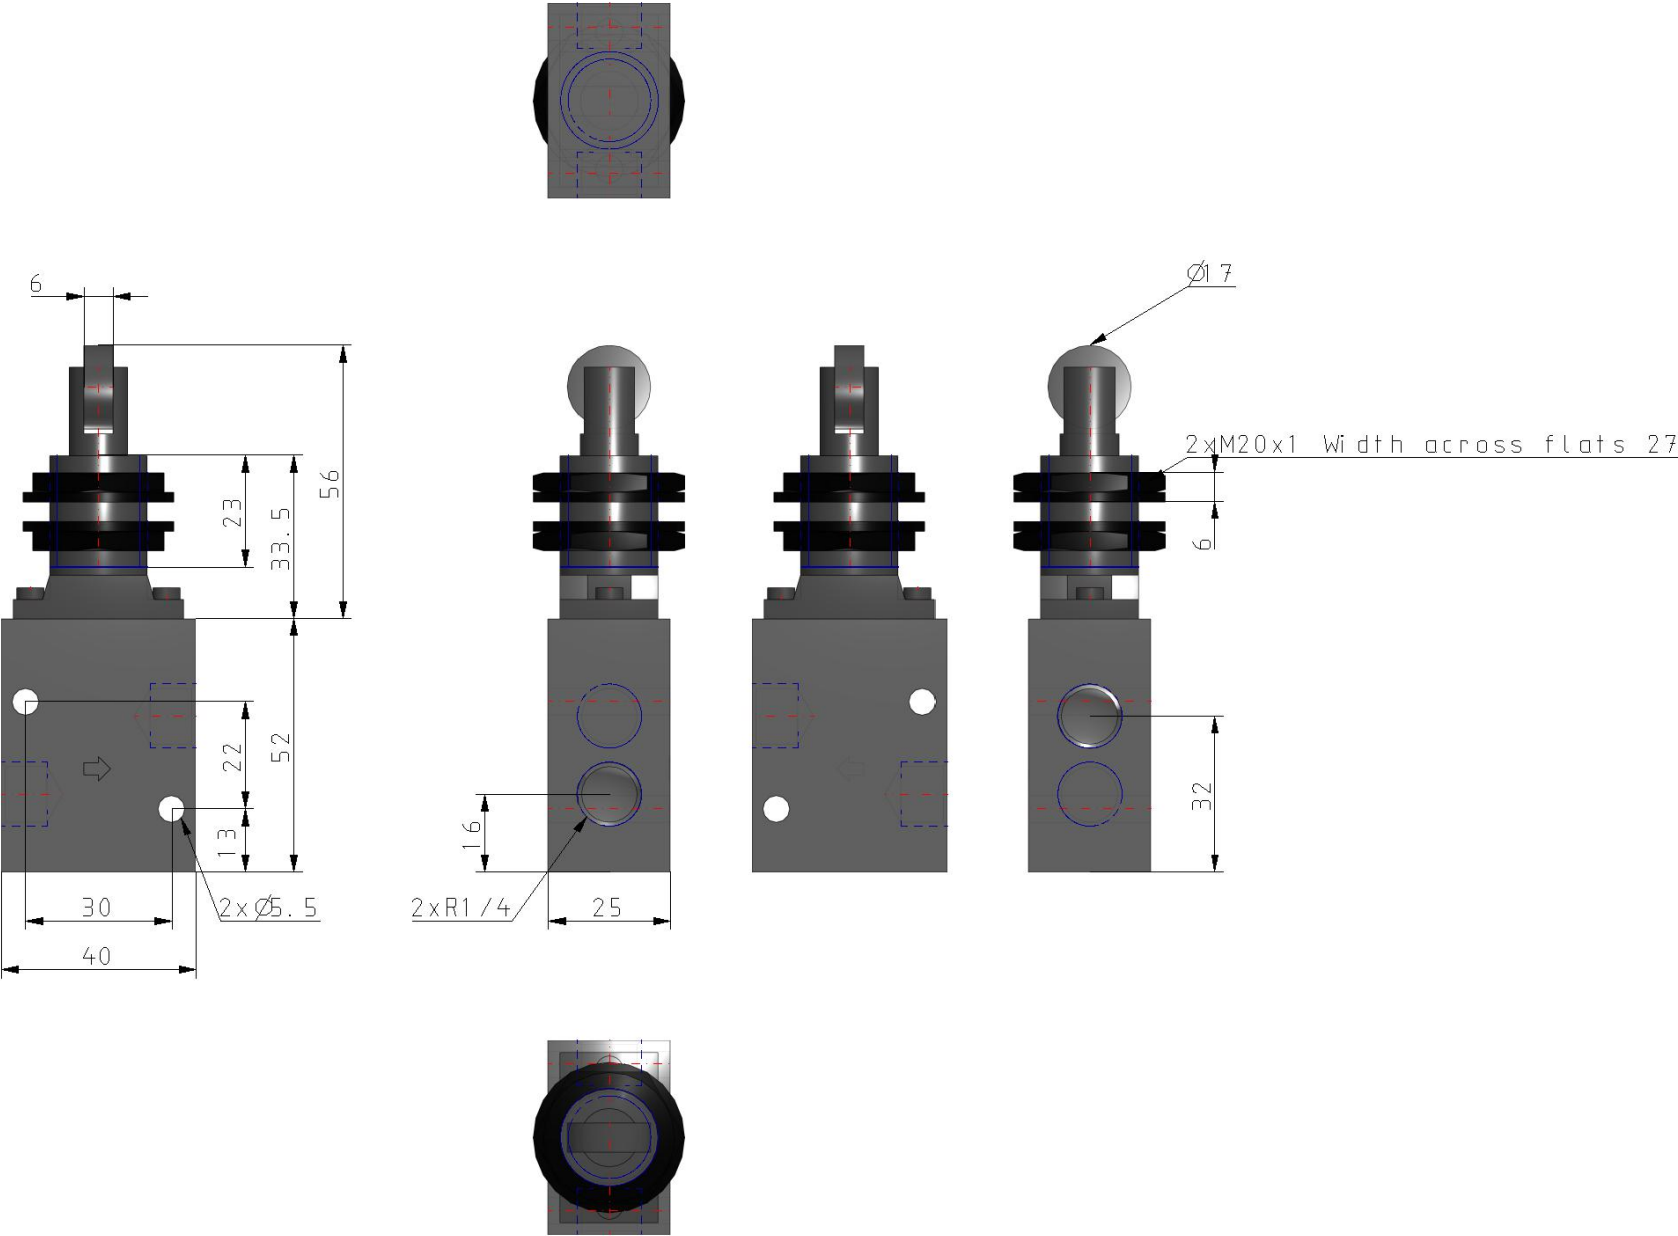

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Constructions

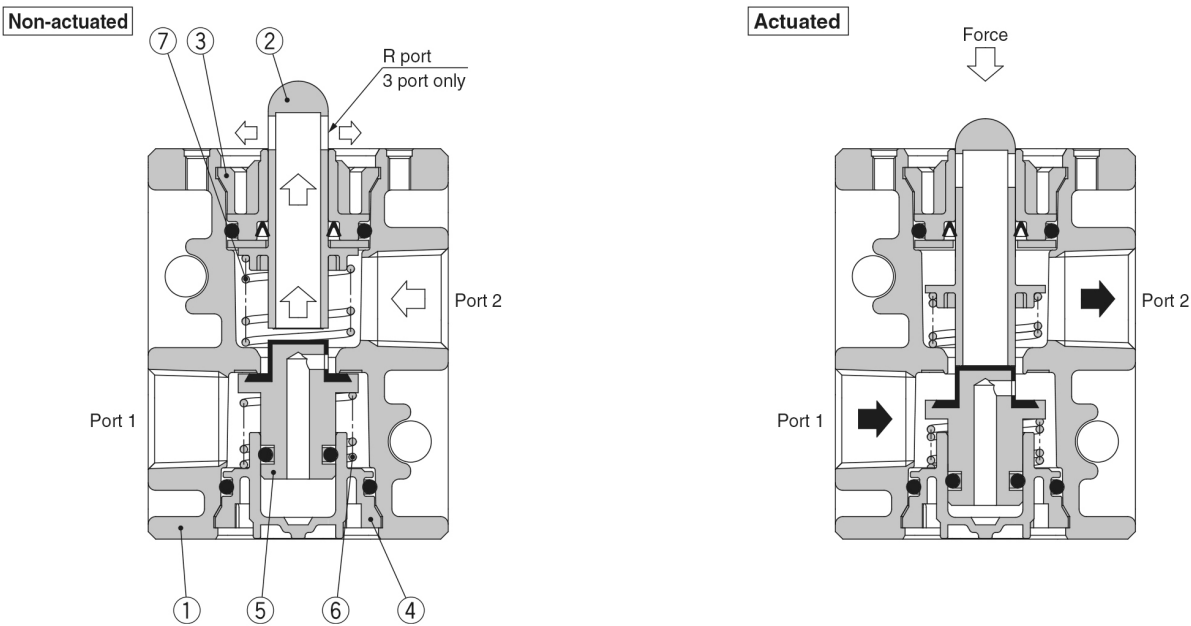

Component Parts

No.	Description	Material	Note	
1	Valve	ADC	White coated	
2	Plunger	Polyacetal	2 port	Grey
			3 port	White
3	Plunger retainer	PBT		
4	Cover	PBT		
5	Inner valve	NBR, Brass		
6	Spring	Stainless steel		
7	Spring	Spring steel		

Additional information

Catalogue	VM100-200-A_EU.pdf
Installation manuals	IM_VM100_TF2Z478EN-C.pdf