

## VNB (Solenoid), Process Valve for Flow Control

### EVNB611AV-F40A-5D-Q

Datasheet

### General series information


- Process valve series VNB
- External pilot solenoid
- Orifice size: 7mm to 50mm
- Port size: 1/8 to 2 Rc(PT)
- Seal material: NBR, FKM, EPR

### Standard specifications


|                                        |                                                     |
|----------------------------------------|-----------------------------------------------------|
| Area Code                              | E (Europe)                                          |
| Size                                   | 6 [ø40 (N.C. 0.5 MPa/N.O. 1 MPa), ø28 (N.C. 1 MPa)] |
| Valve Type                             | 1 [NC (Operating Pressure 05 MPa)]                  |
| Sealant                                | A (NBR Seal)                                        |
| Body Material                          | Standard (Bronze Body)                              |
| Pilot System Option                    | V (Vacuum Pilot)                                    |
| Thread                                 | F (G(PF))                                           |
| Port Size                              | 40A (1 1/2)                                         |
| Voltage                                | 5 (24VDC)                                           |
| Lead Wire                              | D (DIN Terminal)                                    |
| Manual Override                        | Non-locking Push Style                              |
| Bracket                                | None                                                |
| CE Marked                              | Q (CE Marked)                                       |
| Maximum temperature of pressure medium | 60 °C                                               |
| Minimum temperature of pressure medium | -5 °C                                               |
| Proof pressure                         | 1.5 MPa                                             |
| Maximum ambient temperature            | 50 °C                                               |
| Minimum ambient temperature            | -5 °C                                               |

|                                 |                       |
|---------------------------------|-----------------------|
| Pressure range                  | Low vacuum to 0.5 MPa |
| External pilot air: Press.      | 0.25 - 0.7 MPa        |
| External pilot air: Temperature | -5 °C - 50 °C         |
| Weight                          | 4.200 Kg              |

Dimensions

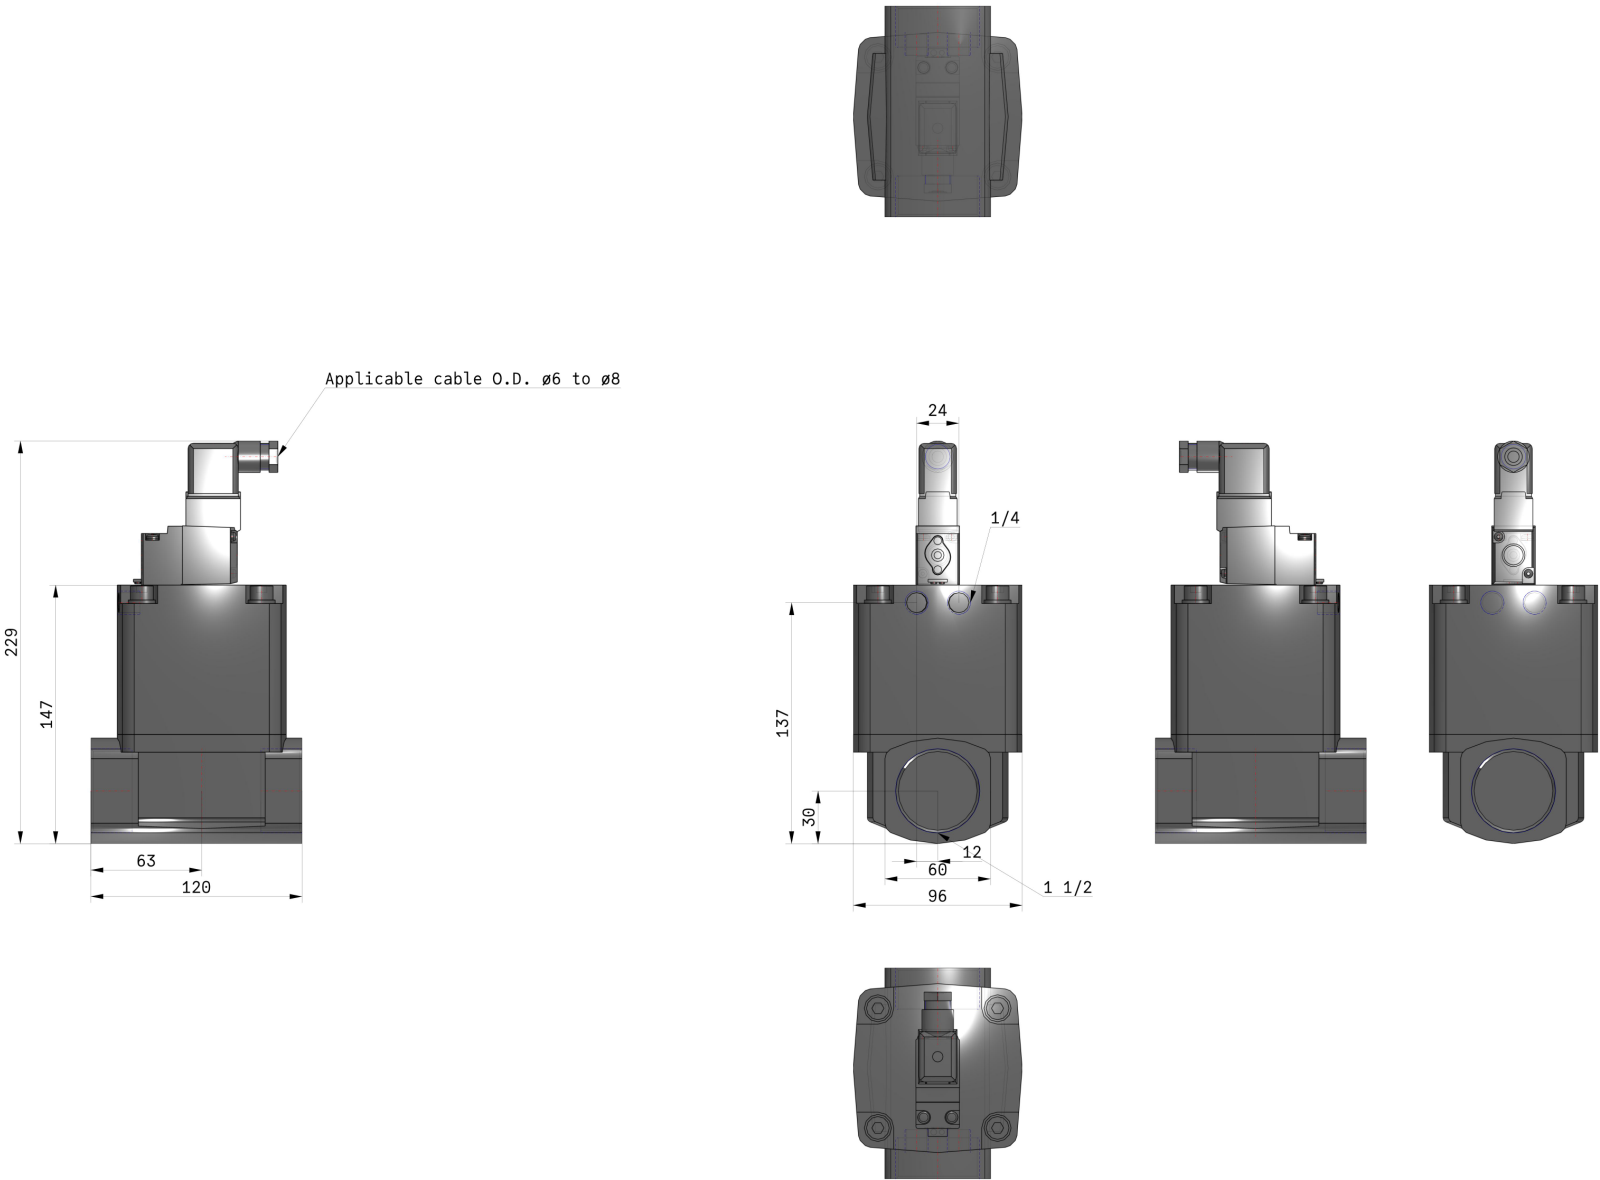

# Constructions

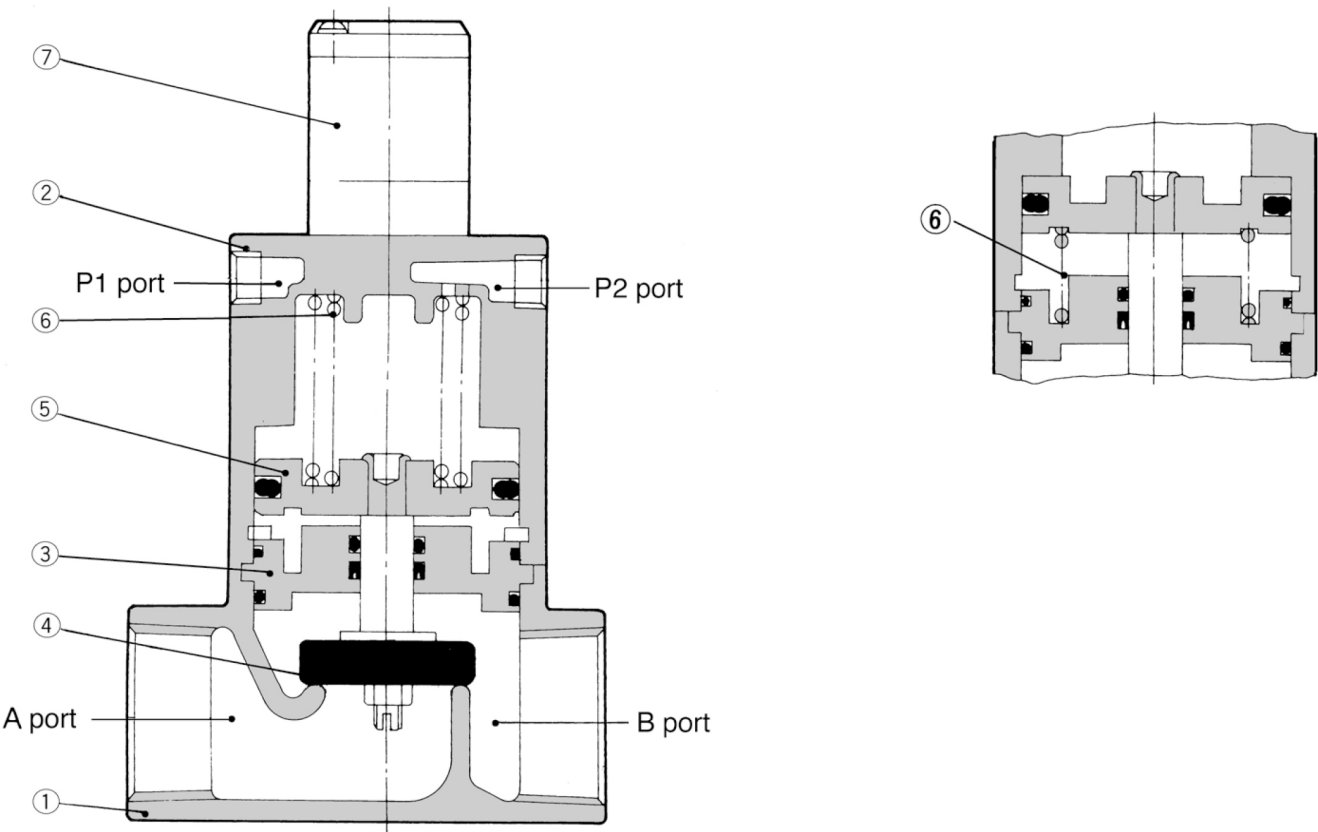

## Component Parts

| No. | Description          | Material        | Note                           |
|-----|----------------------|-----------------|--------------------------------|
| ①   | Body                 | Bronze*         | Clear coated                   |
| ②   | Cover assembly       | Aluminium alloy | Platinum silver painted        |
| ③   | Plate assembly       | Brass*          | Valve material (NBR, FKM, EPR) |
| ④   | Valve element        | (NBR, FKM, EPR) | Stainless steel or brass       |
| ⑤   | Piston assembly      | Aluminium alloy | —                              |
| ⑥   | Return spring        | Piano wire      | —                              |
| ⑦   | Pilot solenoid valve | —               | —                              |

Note) Parts ③ and ④ are for selection of valve composition.

\* The body option "S" is stainless steel, and "L" is aluminum.

## Additional information

|                           |                                                                                  |
|---------------------------|----------------------------------------------------------------------------------|
| Catalogue                 | <a href="#">VN_EU.pdf</a>                                                        |
| Declaration of conformity | <a href="#">newDoC_VN_TF1Z328EN.pdf</a><br><a href="#">DoC_VNx_TFM0001-B.pdf</a> |
| Installation manuals      | <a href="#">IM_VNB_TF2Z301EN-D.pdf</a>                                           |
| Operation manuals         | <a href="#">OM_VNB_OMA0005EN-E.pdf</a>                                           |