

Push-In Y-Fitting QSY-1/2-10 - Festo 133196

Item no. FES-133196

Manufacturer Festo


EAN 4052568259396

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class CRC **1 - low corrosion stress**

Design	Push-pull principle
Material	PBT
Medium	Compressed air, water
Mounting position	arbitrary
Nominal size DN [mm]	7,8
Operating conditions	ISO 8573-1
Pneumatic connection	R1/2
Series	QSY
Size BG	Standard
Temperature (max.)	80
Weight	0.065 kg
Zolltarifnummer	74198090

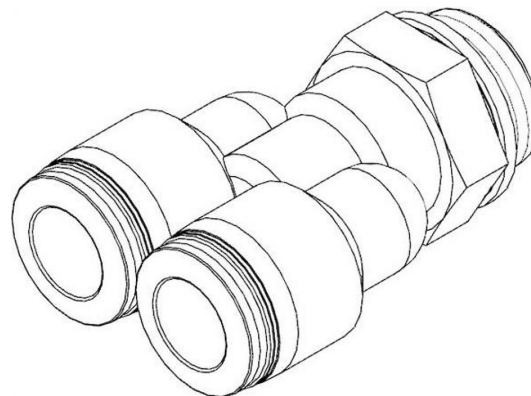

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

size	Standard
Nominal width [mm]	7,8
Seal type on stud	coating
installation position	arbitrary
Packing size	10
Construction set up	Push-pull principle
Operating pressure complete temperature range [bar]	-0.95 to 6
Temperature depending operating pressure [bar]	-0.95 to 14
Maritime classification	see Certificate

A1-ESD equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com
fluidics-equipment.com

Page 1/2

Operating medium	Compressed air to ISO 8573-1:2010 [7::-] Water according to manufacturer declaration at www.festo.com
Information about operating and control medium	Oiled operation possible
Corrosion resistant class KBK	1 - low corrosion stress
ambient temperature [°C]	-10 to 80
Product weight [g]	66,0
Pneumatic connection 1	Male thread R1/2
Pneumatic connection 2	For hose exterior diameter 10 mm
Sleeve colour	 blue
Material information	RoHs compliant
Housing material	PBT
Sleeve material	POM
Tube seal, hose seal material	NBR
Hose clamping segment material	High-alloyed stainless steels
Number of outlets	2
Number of supply lines	1