

SV2000, 5 Port Solenoid Valve, All Types - SMC SV2200-5FUD


Item no. SMC-SV2200-5FUD

Manufacturer SMC

Pilot: Internal Pilot Function: 2 (2 Position Double) Voltage: 5 (24VDC) Light & Surge Suppressor: U (Light & Surge Suppressor)
Manual Override: D (Push-turn Locking Driver Operation Manual Button)

TECHNICAL DATA

Weight	0.08 kg
Zolltarifnummer	84812090

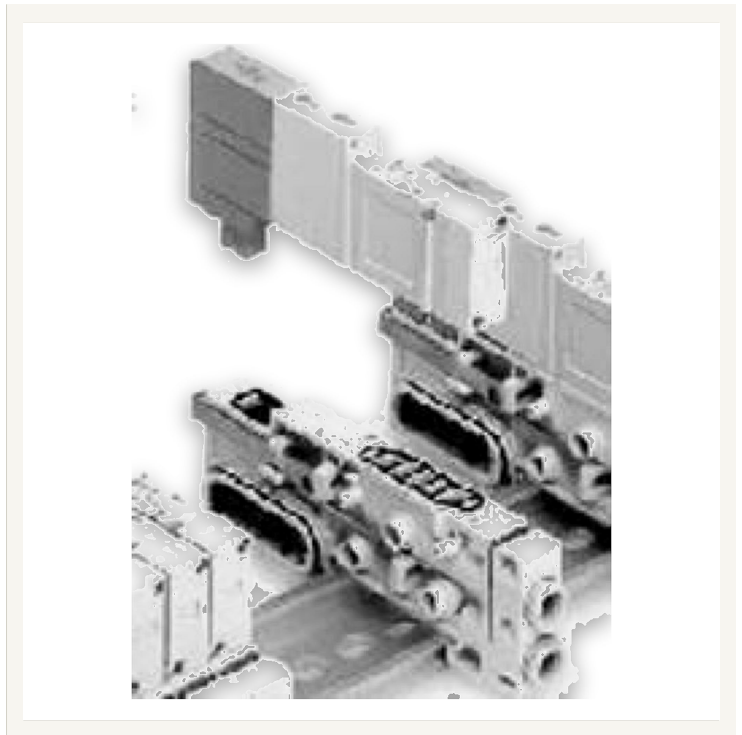

DESCRIPTION

- Multi-pin connector type valve
- High flow rates between 216-1477 l/min
- Power consumption: 0.6 W (standard)
- Wide variety of wiring configurations
- Easy mounting and fast replacement
- Up to IP67 enclosure
- Cassette base and tie-rod base types.