

SV2000, 5 Port Solenoid Valve, All Types - SMC SV2400R-5FU


Item no. SMC-SV2400R-5FU

Manufacturer SMC

Pilot: R (External Pilot) Function: 4 (3 Position Exhaust Centre)
Voltage: 5 (24VDC) Light & Surge Suppressor: U (Light & Surge
Suppressor) Manual Override: Non-locking Push Style

TECHNICAL DATA

Weight	0.085 kg
Zolltarifnummer	84818079

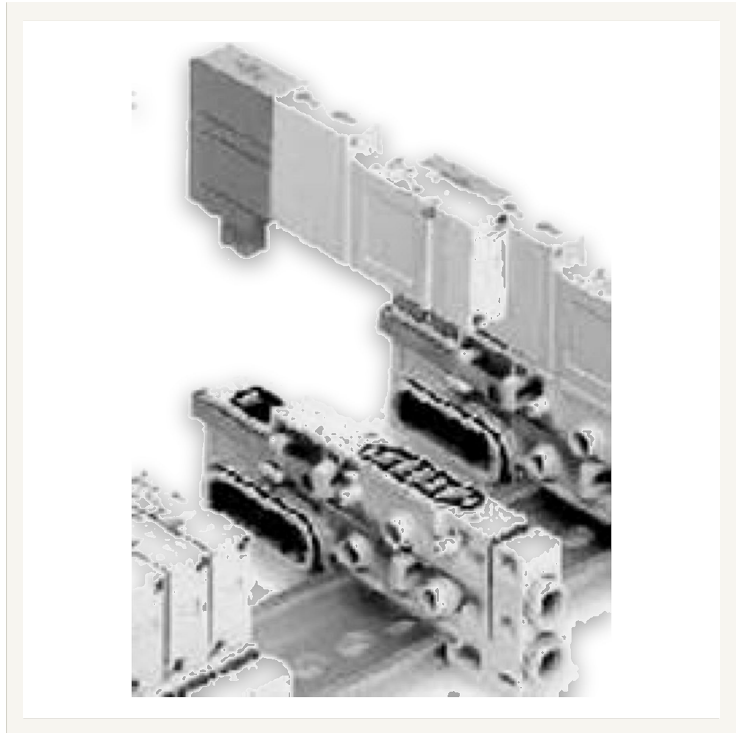

DESCRIPTION

- Multi-pin connector type valve
- High flow rates between 216-1477 l/min
- Power consumption: 0.6 W (standard)
- Wide variety of wiring configurations
- Easy mounting and fast replacement
- Up to IP67 enclosure
- Cassette base and tie-rod base types.