

C96S(D) ø125, ISO Cylinder, Double Acting, Single/Double Rod - SMC C96SDG125-25


Item no. SMC-C96SDG125-25

Manufacturer SMC

Magnet: D (Built-in) Mounting: G (Head End Flange) Bore Size: 125mm Stroke: 25 Rod Boot: None Rod: Single Rod Auto Switch: No Switch Lead Wire or Prewired Connector: 0.5m [Or None in the Case of No Switch] Number: 2 pcs. [Or None in the Case of No Switch] Rod End Options: None Temperature Resistance: None Heavy Duty Scraper: None Tie Rod: None Fluororubber Seal: None Made of Stainless Steel (-XC68): None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84123100

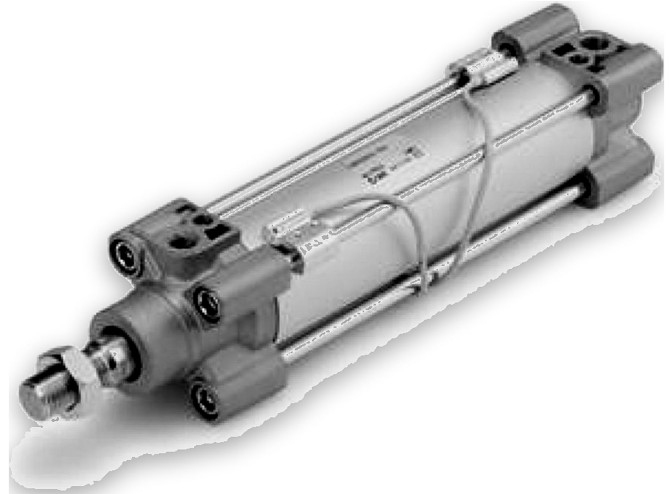

STANDARDS & COMPLIANCE

ISO 15552

DESCRIPTION

- ISO 15552 Tie Rod Cylinder.
- Bore sizes (mm): 32, 40, 50, 63, 80, 100, 125.
- Strokes up to 2000 mm.
- Cylinder variations: Non-rotating, smooth, with lock unit, ATEX.