

VF3000, 5 Port Solenoid Valve w/Rectifier - SMC VF3430-5Y01-01F

Item no. SMC-VF3430-5Y01-01F

Manufacturer SMC


Configuration: 4 (3 Position Exhaust Centre) Piping: 3 (Body Ported) Exhaust: 0 (Individual) Pressure Specification: Standard (0.7MPa) Coil specification: Standard Rated Voltage: 5 (24VDC) Lead Wire: YO (DIN EN175301-803 Terminal w/o Connector) Light/Surge Suppressor: Without light/surge voltage suppressor Manual Override: Non-locking Push Type A, B Port Size: 01 (1/8) Thread: F (G) Bracket: None Made to Order: None

TECHNICAL DATA

Norm EN 175301-803

Weight 0.1 kg

Zolltarifnummer 84812090

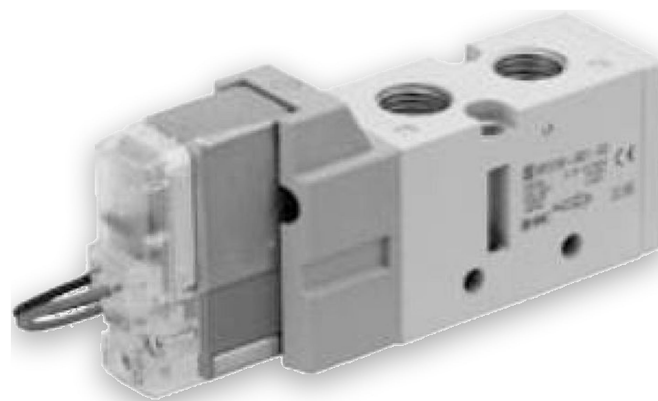

STANDARDS & COMPLIANCE

DIN EN175301-803

DESCRIPTION

Series VF, a five port pilot solenoid valve, offers large flow capacity in a compact size. The VF is available in many variations including three types of manual override and four types of electrical entry. Common exhaust for main valve and pilot valve is also available.