

VP300, 3 Port Pilot Operated Poppet - SMC

VP342-5D1-02FA-F


Item no. SMC-VP342-5D1-02FA-F

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: Standard (Internal pilot)
 Pressure Specification: Standard (0.7 MPa) Coil Specification:
 Standard Rated Voltage: 5 (24V DC) Electrical Entry: D (DIN
 terminal, With connector) Light and Surge Voltage Suppressor:
 None Manual Override: Non-locking Push Style Port Size: 02 (1/4)
 Thread: F [G (PF)] Actuation: A (Normally Closed) Option: F (With
 bracket) Made to Order: None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

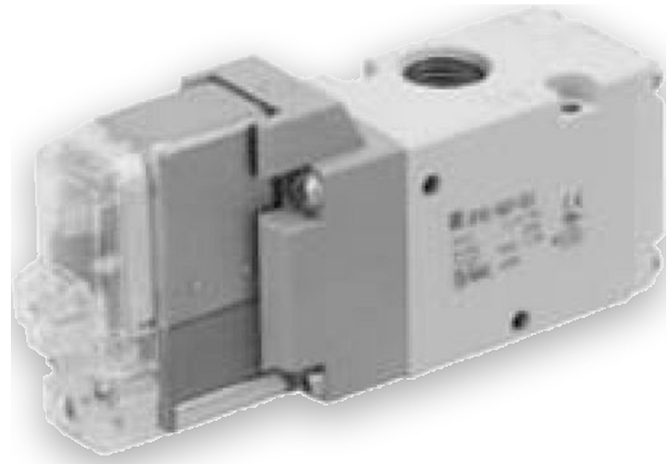

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.