

VP300, 3 Port Pilot Operated Poppet - SMC

VP342-5YUD1-02FA


Item no. SMC-VP342-5YUD1-02FA

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: Standard (Internal pilot)
 Pressure Specification: Standard (0.7 MPa) Coil Specification:
 Standard Rated Voltage: 5 (24V DC) Electrical Entry: Y [DIN
 terminal, With connector (EN175301-803B)] Light and Surge
 Voltage Suppressor: U [With light/surge voltage suppressor (Non-
 polar)] Manual Override: D (Push-turn Locking Slotted Type) Port
 Size: 02 (1/4) Thread: F [G (PF)] Actuation: A (Normally Closed)
 Option: None Made to Order: None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

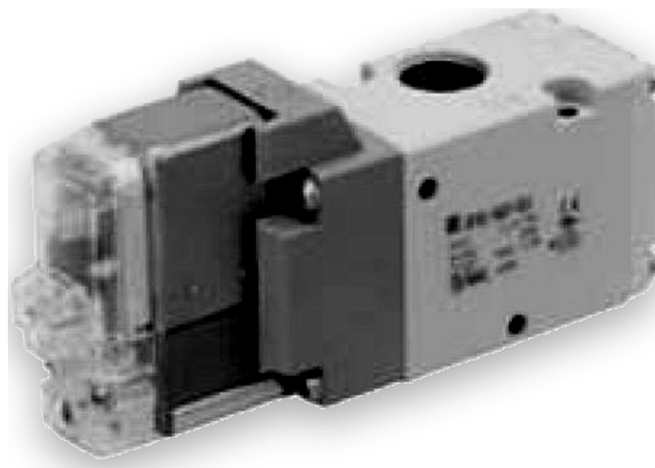

STANDARDS & COMPLIANCE

EN175301-803

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.