

VP300, 3 Port Pilot Operated Poppet - SMC

VP342K-5YO1-02FB

Item no. SMC-VP342K-5YO1-02FB

Manufacturer SMC


Body Style: 2 (Body Ported) Valve Option: Standard (Internal pilot)
 Pressure Specification: K [High-pressure type (1.0 MPa)] Coil
 Specification: Standard Rated Voltage: 5 (24V DC) Electrical
 Entry: YO [DIN terminal, Without connector (EN175301-803)]
 Light and Surge Voltage Suppressor: None Manual Override: Non-
 locking Push Style Port Size: 02 (1/4) Thread: F [G (PF)] Actuation:
 B (Normally Open) Option: None Made to Order: None

TECHNICAL DATA

Norm EN 175301-803

Weight 0.1 kg

Zolltarifnummer 84812090

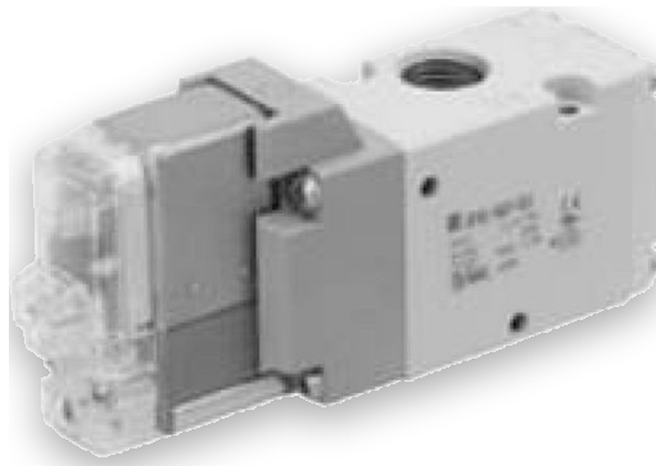

STANDARDS & COMPLIANCE

EN175301-803

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.