

VP300, 3 Port Pilot Operated Poppet - SMC VP342R-3DZ1-02FA


Item no. SMC-VP342R-3DZ1-02FA

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: R (External Pilot)
Pressure Specification: Standard (0.7 MPa) Coil Specification:
Standard Rated Voltage: 3 (110V AC to 120V AC 50/60Hz)
Electrical Entry: D (DIN terminal, With connector) Light and Surge
Voltage Suppressor: Z (With light and surge voltage) Manual
Override: Non-locking Push Style Port Size: 02 (1/4) Thread: F [G
(PF)] Actuation: A (Normally Closed) Option: None Made to Order:
None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

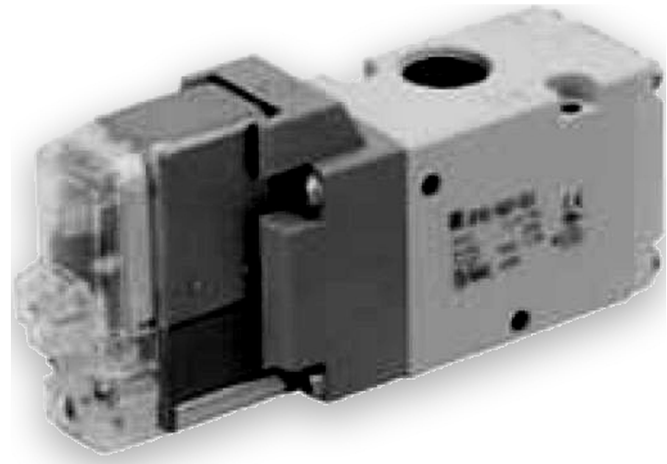

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.